(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20150 A1

(51) International Patent Classification[7]: F02D 13/04, F01L 1/34

(21) International Application Number: PCT/US00/25298

(22) International Filing Date: 15 September 2000 (15.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/154,473 17 September 1999 (17.09.1999) US

(71) Applicant: DIESEL ENGINE RETARDERS, INC. [US/US]; 16 West Main Street, Christiana, DE 19702 (US).

(72) Inventors: JANAK, Robb; 255 Gulf Road, Somers, CT 06071 (US). LAK, Stephen, J.; 23 Craig Drive - G5, West Springfield, MA 01089 (US).

(74) Agents: COYNE, Patrick, J. et al.; Collier Shannon Scott, PLLC, Suite 400, 3050 K Street, Washington, DC 20007 (US).

(81) Designated States *(national)*: BR, JP, KR.

(84) Designated States *(regional)*: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published:
— *With international search report.*

(54) Title: CAPTIVE VOLUME ACCUMULATOR FOR A LOST MOTION SYSTEM

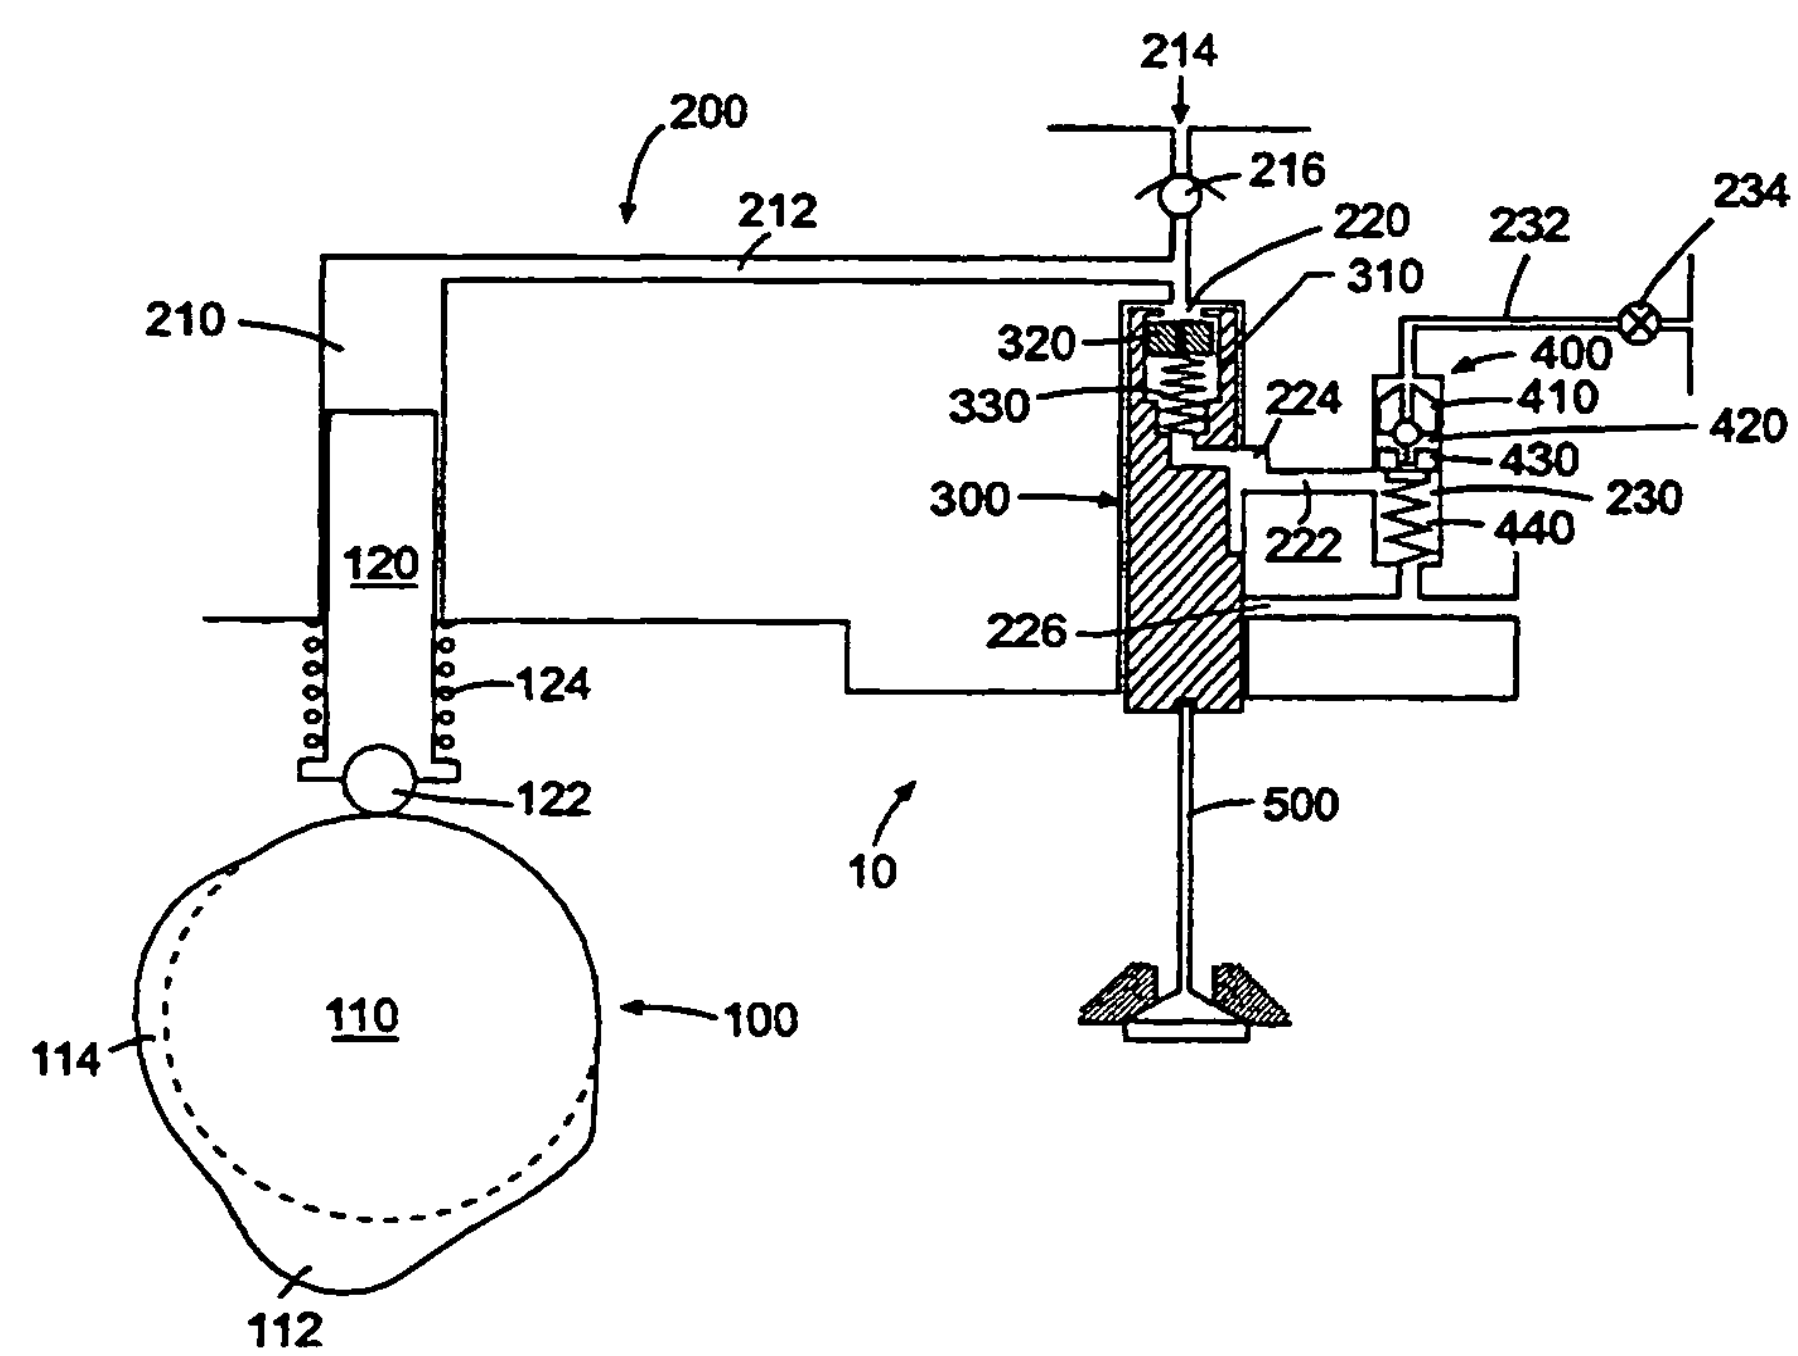

(57) Abstract: The present invention is directed to a method or system disclosing a captive volume in a hydraulically or pneumatically locked, or vented circuit in order to corresponding maintain, or increase the total volume of the hydraulic circuit. The structural elements of an embodiment of the present invention may include an accumulator (320) with or without a fixed solid stop (314, 316), which limits its travel. The accumulator can either be a separate entity, or as an assembly within the master (120) or slave (310) pistons.

WO 01/20150 A1

CAPTIVE VOLUME ACCUMULATOR FOR A LOST MOTION SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

The present application relates to and claims priority on U.S. Provisional Patent Application No. 60/154,473, filed September 17, 1999.

FIELD OF THE INVENTION

The present invention relates generally to a system and method for opening at least one valve in an internal combustion engine. More specifically the invention relates to a system and method, used both during positive power and engine braking engine operating conditions, for controlling the amount of "lost motion" between the at least one valve and an assembly for opening the at least one valve.

BACKGROUND OF THE INVENTION

Valve actuation in an internal combustion engine is required in order for the engine to produce positive power, as well as to produce engine braking. During positive power, intake valves may be opened to admit fuel and air into a cylinder for combustion. The exhaust valves may be opened to allow combustion gas to escape from the cylinder.

During engine braking, the exhaust valves may be selectively opened to convert, at least temporarily, an internal combustion engine of compression-ignition type into an air compressor. In doing so, the engine develops retarding horsepower to help slow the vehicle down. This can provide the operator with increased control over the vehicle and substantially reduce wear on the service brakes of the vehicle. A properly designed and adjusted compression release-type engine brake can develop retarding horsepower that is a substantial portion of the operating horsepower developed by the engine in positive power.

In many internal combustion engines the engine cylinder intake and exhaust valves may be opened and closed by fixed profile cams in the engine, and more specifically by one or more fixed lobes which may be an integral part of each of the cams. The use of fixed profile cams makes it difficult to adjust the timings and/or amounts of engine valve lift to optimize valve opening times and lift for various engine operating conditions, such as different engine speeds.

One method of adjusting valve timing and lift, given a fixed cam profile, has been to incorporate a "lost motion" device in the valve train linkage between the valve and the cam. Lost

motion is the term applied to a class of technical solutions for modifying the valve motion proscribed by a cam profile with a variable length mechanical, hydraulic, or other linkage assembly. In a lost motion system, a cam lobe may provide the "maximum" (longest dwell and greatest lift) motion needed over a full range of engine operating conditions. A variable length system may then be included in the valve train linkage, intermediate of the valve to be opened and the cam providing the maximum motion, to subtract or lose part or all of the motion imparted by the cam to the valve.

This variable length system (or lost motion system) may, when expanded fully, transmit all of the cam motion to the valve, and when contracted fully, transmit none or a minimum amount of the cam motion to the valve. An example of such a system and method is provided in Hu, U.S. Patent Nos. 5,537,976 and 5,680,841, which are assigned to the same assignee as the present application and which are incorporated herein by reference.

In the lost motion system of U.S. Patent No. 5,680,841, an engine cam shaft may actuate a master piston which displaces fluid from its hydraulic chamber into a hydraulic chamber of a slave piston. The slave piston in turn acts on the engine valve to open it. The lost motion system may be a solenoid valve and a check valve in communication with the hydraulic circuit including the chambers of the master and slave pistons. The solenoid valve may be maintained in a closed position in order to retain hydraulic fluid in the circuit. As long as the solenoid valve remains closed, the slave piston and the engine valve respond directly to the motion of the master piston, which in turn displaces hydraulic fluid in direct response to the motion of a cam. When the solenoid is opened temporarily, the circuit may partially drain, and part or all of the hydraulic pressure generated by the master piston may be absorbed by the circuit rather than be applied to displace the slave piston.

Previous lost motion systems have typically not utilized high speed mechanisms to rapidly vary the length of the lost motion system. Lost motion systems of the prior art have accordingly not been variable such that they may assume more than one length during a single cam lobe motion, or even during one cycle of the engine. By using a high speed mechanism to vary the length of the lost motion system, more precise control may be attained over valve actuation, and accordingly optimal valve actuation may be attained for a wide range of engine operating conditions.

The lost motion system and method of the present invention may be particularly useful in engines requiring valve actuation for both positive power and for compression release retarding and exhaust gas recirculation valve events. Typically, compression release and exhaust gas recirculation

events involve much less valve lift than do positive power related valve events. Compression release and exhaust gas recirculation events may however require very high pressures and temperatures to occur in the engine. Accordingly, if left uncontrolled (which may occur with the failure of a lost motion system), compression release and exhaust gas recirculation could result in pressure or temperature damage to an engine at higher operating speeds. Therefore, it may be beneficial to have a lost motion system which is capable of providing control over positive power, compression release, and exhaust gas recirculation events, and which will provide only positive power or some low level of compression release and exhaust gas recirculation valve events, should the lost motion system fail.

An example of a lost motion system and method used to obtain retarding and exhaust gas recirculation is provided by the Gobert, U. S. Patent No. 5,146,890 (Sept. 15, 1992) for a Method And A Device For Engine Braking A Four Stroke Internal Combustion Engine, assigned to AB Volvo, and incorporated herein by reference. Gobert discloses a method of conducting exhaust gas recirculation by placing the cylinder in communication with the exhaust system during the first part of the compression stroke and optionally also during the latter part of the inlet stroke. Gobert uses a lost motion system to enable and disable retarding and exhaust gas recirculation, but such system is not variable within an engine cycle.

The development of lost motion systems has also lead to the integration of such systems into existing engine components, as opposed to adding such systems aftermarket. One particular form of system integration that appears desirable is the integration of the lost motion system into an engine rocker arm, such as is shown in Hu, U.S. Patent No. 5,680,841. By integrating the lost motion system into the engine rocker arm, savings in weight, size, and cost may be available.

All of the foregoing developments, such as high speed lost motion actuation, and rocker arm integration, have necessitated independently and collectively, smaller, faster, more robust, more controllable, and more compliant lost motion components. One such component that requires improvement to meet the needs of these new and advanced lost motion systems is the system accumulator.

Lost motion systems may require the use of an accumulator to absorb hydraulic fluid that is quickly shuttled into and out of the system, as well as to handle the rapid pressure changes (i.e. from high pressure to low pressure and visa-versa) that occur in the system as a result of high speed actuation. The very nature of accumulators dictates that they be sufficiently robust to withstand high

and rapidly changing pressures. Compliance issues also require that the accumulators be located as closely as possible to the lost motion element with which they are in hydraulic communication. Compliance issues also mandate that the lost motion system, and to some degree, the accumulator, be adapted to bleed air from the working fluid thereby reducing the compressibility of the fluid.

Locating an accumulator near a lost motion element, particularly one integrated into an engine rocker arm, constrains the size and weight of the accumulator, which in turn affects the designers ability to make the accumulator robust. There is a natural inverse relationship between the robustness of an accumulator and its size and weight. The smaller and lighter the accumulator, the less robust it tends to be. Thus, the combination of loading and space requirements of accumulator pistons associated with integrated engine brakes provides a challenge to engine brake designers. In view of the foregoing, there is a need for an accumulator that is reduced in size, cost effective, sufficiently robust, capable of bleeding air, and controllable.

It has been determined that control over the amount of hydraulic fluid that the accumulator is designed to accumulate may be particularly important to the operation of the lost motion system. Without precise accumulator control, an engine valve may experience over-travel or under-travel. Moreover, imprecise accumulator control may have a negative impact on control and consistency of engine valve seating timing and velocities.

Engine valve over-travel during main events may result in valve to piston contact or the need for valve pockets in the piston. Neither valve to piston contact, nor valve pockets are desirable. Under-travel may lead to ineffective auxiliary valve events, such as compression-release events, or ineffective overlap between main intake and exhaust events. In order to reduce the likelihood of valve over-travel or under-travel, and to provide desirable valve seating timing and velocities, Applicant has developed an accumulator that absorbs a predetermined fixed volume of hydraulic fluid upon each actuation cycle of the engine brake. This accumulator provides the ability to lose the precise amount of motion provided by an engine brake lobe, or another auxiliary lobe on the exhaust cam. The loss of this precise amount of motion permits the engine valve to seat consistently, and the engine piston to be provided without pockets, while avoiding the likelihood of valve to piston contact.

Accumulator design must also take into account the undesired heating of the hydraulic fluid used in the lost motion system. Typically, engine oil is used as the working hydraulic fluid. Such engine oil enters the system already somewhat heated due to its use in the operation of the engine. The oil in the lost motion system is further heated as a result of flowing rapidly through the passages

that make up the system. It would therefore be beneficial to provide accumulators with some means of cycling hydraulic fluid through the lost motion system so that there is a constant influx of fresh cool fluid into the system.

In order to provide an accumulator with all of the foregoing beneficial characteristics. Applicant has developed an accumulator that may be integrated into a lost motion piston, such as a slave piston. Such an integrated accumulator saves space and cost due to the use of the slave piston bore as the bore for the accumulator. The integrated accumulator is also capable of being quite robust because it may be manufactured of the same strength steel used for the slave piston.

Applicant has also developed an accumulator capable of providing a precise amount of lost motion clipping of a main engine valve event. Such precise clipping is attained through use of a fixed volume or fixed displacement accumulator. Clipping without a fixed volume may either result in too much, or too little engine valve travel being removed. The later may result in valve-to-piston contact, and the former may cause the valve to be seated at a higher velocity than desired. At a minimum, this may lead to increased engine valve seat wear, and possibly to some form of engine valve failure.

In accordance with embodiments of the present invention, it is contemplated that the accumulator system may be located in a master piston, a slave piston, or separate piston. It is further contemplated that in accordance with the present invention the accumulator system may be located within a rocker arm assembly of an engine rocker brake.

OBJECTS OF THE INVENTION

It is therefore an object of the present invention to provide a lost motion system accumulator with improved robustness for its size.

It is another object of the present invention to provide a lost motion system accumulator that reduces accumulator bore wear.

It is another object of the present invention to reduce the package size of a lost motion system accumulator.

It is a further object of the present invention to provide a more cost effective method for packaging a lost motion system accumulator.

It is still another object of the present invention to reduce some of the variances of bleed rate for a lost motion system accumulator due to pressure differentials.

It is yet another object of the present invention to improve braking performance by improving compliance of a lost motion system accumulator.

It is still yet another object of the present invention to provide a lost motion system accumulator capable of venting and/or absorbing a fixed volume of hydraulic fluid to eliminate valve-to-piston clearance issues.

It is still another object of the present invention to provide a lost motion system accumulator with desirable air bleeding and hydraulic fluid circulation capabilities.

It is still another object of the present invention to provide a lost motion system accumulator that will reduce engine valve spring stresses as a result of fixed volume accumulator.

It is still another object of the present invention to provide a lost motion system accumulator that provides lower engine valve seating velocities.

It is still another object of the present invention to provide a lost motion system accumulator that provides more consistent valve seating timing and velocities.

Additional objects and advantages of the invention are set forth, in part, in the description which follows and, in part, will be apparent to one of ordinary skill in the art from the description and/or from the practice of the invention.

SUMMARY OF THE INVENTION

In response to the foregoing challenge, Applicant has developed an innovative, economical method or system for providing a lost motion accumulator that uses a captive (fixed) volume that can be selectively hydraulically or pneumatically locked, or vented in order to maintain or increase the total volume of the lost motion system.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only, and are not restrictive of the invention as claimed. The accompanying drawings, which are incorporated herein by reference, and which constitute a part of this specification, illustrate certain embodiments of the invention, and together with the detailed description serve to explain the principles of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in conjunction with the following drawings in which like reference numerals designate like elements and wherein:

Fig. 1 is a schematic view of a captive volume accumulator system in accordance with a first embodiment of the present invention.

Fig. 2 is a schematic view of a captive volume accumulator system in accordance with a second embodiment of the present invention.

Fig. 3 is a schematic view of a captive volume accumulator system in accordance with a third embodiment of the present invention.

Fig. 4 is a schematic view of a captive volume accumulator system in accordance with a fourth embodiment of the present invention.

Fig. 5 is a schematic view of a captive volume accumulator system in accordance with a fifth embodiment of the present invention.

Fig. 6 is a graphical representation of a valve lift profile according to an embodiment of the present invention.

Fig. 7 is a schematic view of an accumulator control valve in an "OFF" position in accordance with a sixth embodiment of the present invention.

Fig. 8 is a schematic view of the control valve of Fig. 7 in an "ON" position.

Fig. 9 is a schematic view of an accumulator control valve in an "OFF" position in accordance with a seventh embodiment of the present invention.

Fig. 10 is a schematic view of the control valve of Fig. 9 in an "ON" position.

Fig. 11 is a schematic view of an accumulator control valve in an "OFF" position in accordance with an eighth embodiment of the present invention.

Fig. 12 is a schematic view of the control valve of Fig. 11 in an "ON" position.

Fig. 13 is a detailed view of the slave piston and accumulator assembly shown in Fig. 1.

Fig. 14 is a schematic view of a captive volume accumulator system in accordance with a ninth embodiment of the present invention.

Fig. 15 is a schematic view of a captive volume accumulator system in accordance with a tenth embodiment of the present invention in which the system is integrated into an engine rocker arm.

Fig. 16 is a view of the tenth embodiment shown in Fig. 15 along section C-C.

Figs. 17-19 are illustrations of a captive volume accumulator system in accordance with an eleventh embodiment of the present invention in which the system is integrated into an engine rocker arm.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A first embodiment of the present invention is shown as accumulator system **10** in Fig. 1. The system **10** includes an energy source **100**, which provides the necessary energy to operate at least one engine valve **500**. The energy source **100** supplies energy to an energy transfer assembly **200**. The energy transfer assembly **200** transfers energy derived from the energy source **100** to an actuating assembly **300**, which activates the at least one engine valve **500**. A control assembly **400** may be provided to control the amount of energy and/or the amount of motion transferred by the energy transfer assembly **200** to the actuating assembly **300**.

With continued reference to Fig. 1, the energy source **100** may comprise a cam **110** as well as other typical valve train elements. The cam **110** may have at least one lobe **112** thereon to provide energy to perform a main engine valve event and at least one lobe **114** to provide energy to perform a secondary engine valve event. The main engine valve event may be a main exhaust event. The secondary engine valve event may include a compression-release braking event and/or an exhaust gas recirculation event. The present invention, however, is not limited to the use of a cam **110** as an energy source to operate the at least one engine valve **500**, rather, it is contemplated that other suitable sources of energy may be employed without departing from the scope of the invention.

The cam **110** may be in operational contact with a roller follower **122** provided on a master piston **120**. The master piston **120** may be slidably disposed in a master piston bore **210** and biased into contact with the cam **110** by the master spring **124**. The master piston bore **210** may be charged with hydraulic fluid from a low pressure supply passage **214**. Oil supplied by passage **214** flows into the system **10**, past a check valve **216**, and through a passage **212**. Oil from the passage **212** fills the master piston bore **210** and enters the slave piston bore **220**.

A slave piston **300** may be slidably disposed in the slave piston bore **220**. The slave piston **300** may include a slave piston body **310**, an accumulator piston **320**, and an accumulator spring **330**. A detailed illustration of the upper portion of the slave piston **300** is shown in Fig. 13. As shown in Fig. 13, the travel of the accumulator piston **320** may be limited by an upper shoulder **314** and a lower shoulder **316**. The upper shoulder **314** may define a central opening **312** through which hydraulic fluid pressure can be applied to the accumulator piston **320**. The upper shoulder **314** may control the maximum volume of oil that may be contained in the accumulator chamber **315**. The

arrangement shown in Fig. 13 provides for automatic lash take up between the slave piston **300** and the engine valve **500**.

The accumulator piston **320** may include a bleed passage **322** that may provide controlled or resultant leakage into the accumulator chamber **315**. The accumulator spring **330** may bias the accumulator piston **320** against the upper shoulder **314** when low pressure oil is provided to the slave piston bore **220**. The accumulator spring **330** may seat on an internal land **316**.

A passage **317** provides hydraulic communication between the chamber **315** containing the accumulator piston **320** and the sidewall of the slave piston body **310**. An annulus or recess **319** may be provided in the slave piston sidewall to facilitate a predetermined amount of hydraulic communication between the accumulator chamber **315** and the control valve bore **230** (shown in Fig. 1).

With renewed reference to Fig. 1, a control passage **222** provides hydraulic communication between the control valve bore **230** and the slave piston bore **220**. The control passage **222** may include an enlarge portion **224** that is designed to provide a predetermined amount of hydraulic communication between the slave piston and control valve bores.

A control valve **400** may be slidably disposed in the control valve bore **230**. The control valve may comprise a check valve body **410**, a check ball **420**, a check ball spring **430**, and a control valve spring **440**. A first end of the control valve bore **230** may connect to a control fluid supply passage **232** that selectively supplies hydraulic fluid to the control valve **400** under the control of a solenoid valve **234**. A second end of the control valve bore **230** may connect to a vent passage **226** that communicates with the atmosphere or a second accumulator (not shown). If the vent passage **226** connects to a second accumulator, the vented fluid may eventually be returned to the fluid supply, and thus the fluid supply passage **232**. The control valve **400** may either be a fast or slow acting mechanical, electro-mechanical, electro-magnetic, pneumatic, or hydraulic valve that controls the communication of the accumulator chamber **315** with the vent passage **226**. The check valve **410** portion of the control valve **400** can also supply low pressure oil to the system **10**.

With continued reference to Fig. 1, the control valve **400** is in an "off" position. The off position is defined as that in which the solenoid valve **234** does not have power supplied to it and the control valve body **410** is at the resting position. When in the off position, the control valve **400** permits hydraulic communication between the accumulator chamber **315** and the vent passage **226** by way of the passage **222**. The off position of the control valve **400** is used to provide positive power engine valve operation (i.e. no compression-release braking).

During positive power operation, the system **10** is charged with low pressure oil from the passage **214**. The check valve **216** prevents the oil provided to the master piston bore **210** and the slave piston bore **220** from flowing back towards the low pressure supply, and thus provides automatic lash take up. The oil provided from the passage **214** is not sufficiently pressurized to depress the accumulator spring **330**. Thus, the accumulator piston **320** remains biased against the upper shoulder **314** when the master piston **120** is at base circle (as shown).

As the cam **110** rotates, the master piston **120** is displaced upward by a secondary lobe **114**. The displacement of the master piston **120** causes the accumulator piston **320** to be correspondingly displaced downward against the bias of the accumulator spring **330** into the accumulator chamber **315** relative to the slave piston body **310**. From an observation point outside of the slave piston **300**, the accumulator piston **320** may move downward to some degree and the slave piston body **310** may move upward to some degree, in accordance with the hydraulic ratios of these elements that is dependent on the relative diameters of the slave piston bore **220** and the accumulator chamber **315**. Relative movement of the accumulator piston **320** and the slave piston body **310** causes the accumulator spring **330** to be depressed because as between it and the engine valve spring (not shown) it provides a lower biasing force. The volume of the accumulator chamber **315** is designed to fully absorb the oil displaced by the master piston **120** as a result of encountering the secondary lobe **114**. The lower shoulder **316** may be located such that the accumulator piston **320** engages the lower shoulder just as the maximum displacement produced by the secondary lobe **114** is applied to the master piston **120**.

After encountering the secondary lobe **114**, the master piston **120** is displaced further by the main event lobe **112**. The additional displacement of oil by the master piston **120** can no longer be absorbed by the accumulator piston **320** because it is already in contact with the lower shoulder **316** as a result of the displacement caused by the secondary lobe **114**. Thus, the additional displacement of hydraulic fluid by the master piston **120** causes the slave piston body **310** to slide downward in the slave piston bore **220** against the bias of the engine valve spring (not shown). In this manner, the main event lobe **112** may converted to a main event opening motion for the engine valve **500**.

Seating of the engine valve **500** occurs as the master piston **120** follows the cam **110** into the saddle of the second base circle (i.e. the secondary lobe **114**). As the master piston **120** follows the cam **110** onto the first base circle, the slave piston **310** and the accumulator piston **320** return to their upper rest positions.

In the positive power mode, the bleed passage **322** is constantly operational. This passage provides system cooling by continuously replacing heated, worked oil with fresh, cooler oil from the supply passage **214**.

In order to place the engine in compression-release braking mode, the solenoid valve **234** may be actuated (or de-actuated, depending on whether the solenoid is arranged as normally open or normally closed). Actuation of the solenoid valve **234** causes low pressure hydraulic fluid to be applied to the control valve **400** through the passage **232**. The oil pressure applied to the control valve **400** causes it to be displaced downward against the bias of the control valve spring **440**. In this position the control valve **400** blocks hydraulic communication between the passage **222** and the vent passage **226**. The check ball **420** of the control valve **400**, however, permits the one way flow of oil into the high pressure circuit (passage **222** and slave piston bore **220**), but not back out of the high pressure circuit. The check ball **420** allows oil to fill the accumulator chamber **315** as the accumulator piston **320** re-attains its upper most position when the cam **110** returns to base circle.

When the solenoid valve **234** is "on", and the cam **110** is at base circle, the accumulator piston **320** is hydraulically locked into its upper position against the upper shoulder **314**. As the cam **110** rotates, the master piston **120** is first displaced upward by the secondary lobe **114**. Because the accumulator piston **320** is locked into position, the displacement of the master piston **120** by the secondary lobe **114** causes a corresponding downward displacement of the slave piston **310**. The downward motion of the slave piston **310** may in turn open the engine valve **500** for a compression-release event.

After the compression-release braking event occurs, the master piston may be further displaced by main event lobe **112** on the cam **110**. The main event lobe **112** cause the slave piston **320** to be further displaced, opening the engine valve **500** for its main event. At a certain point on the main event lobe profile, the recess **319** provided in the slave piston **310** comes into hydraulic communication with the vent passage **226**. When this communication occurs, the high pressure hydraulic fluid locking the accumulator piston **320** into its upper position is released to atmosphere or a second accumulator. This permits the accumulator piston **320** to move downward in the accumulator chamber **315** relative to the slave piston body **310** until it comes to rest on the lower shoulder **316**. Thus, communication of the recess **319** with the vent passage **226** permits the accumulator piston **320** to absorb the precise amount of additional motion provided by the secondary cam lobe **114**. In this manner, the main event motion provided to the engine valve **500** during

engine braking operation is limited to the same amount of motion that is provided by a main event during positive power operation. Therefore, the present invention provides the same valve-to-piston clearance during positive power and engine braking operation.

It is appreciated that the afore-described process could be modified such that an exaggerated main exhaust event is provided by maintaining the control valve **400** in its positive power position during engine braking.

The bleed passage **322** provided in the accumulator piston **320** does not affect the ability of the accumulator piston to be hydraulically locked, which eliminates the variability of orifice bleeding that may ordinarily result from system pressure variations. When the accumulator chamber **315** is vented through the vent passage **226**, however, the bleed passage **322** is also able to vent. A certain amount of oil will be bled through the system each time the accumulator chamber **315** is placed in communication with the vent passage **226**. The position of the vent passage **226** may be selected so as to be anywhere in the range of valve lift for the main event, as long as it is less than the peak lift minus the lost motion portion of the lift. Oil for hydraulic lash adjustment and recovery from lost oil may be regained through the high-pressure check valve contained in the control valve **400**.

The engine valve **500** will seat as the master piston **120** follows the cam **110** back into the saddle of the second base circle (i.e. secondary event **114**). As the master piston **120** begins to travel down the last ramp of the secondary event **114** to the first base circle, the accumulator piston **320** will reset to its upper position under the influence of oil provided through the control valve **400**.

Fig. 6 is a graphical representation of valve lift as disclosed in the present invention. In a lost motion system, where the cam profile has two events: one which can be suppressed, and the second is additive to the first (see Fig. 6 - Braking Lift). This leads to valve to piston clearance issues. A method of eliminating this over-travel, is to vent a fixed volume of oil. If the volume of oil is equal to the amount of lift of the first bump, then the valve will seat a shown. This process can be accomplished with any lost motion system and can use any means to enact the venting of the hydraulic volume.

A second embodiment of the present invention is shown in Fig. 2, in which like reference numerals refer to like elements. The operation of the system shown in Fig. 2 is similar to that of the system shown in Fig. 1. In Fig. 2, a spool valve **412** that includes a check valve at one end serves as the control valve **400**. When the spool valve **412** is in the position shown, the accumulator piston **320** is free to be displaced in the accumulator chamber **315** as the result of high pressure received

through the passage **212**. Displacement of the accumulator piston **320** causes the oil in the chamber **315** to be vented through the vent passage **226**.

The system shown in Fig. 2 may provide compression-release braking by actuating the solenoid valve **234**, which in turn causes oil to flow through the passage **232** and displace the spool valve **412** upward. This displacement of the spool valve **412** blocks communication between the passage **222** and the vent passage **226**, thereby hydraulically locking the accumulator piston **320** into its upper position. One way flow of oil into the accumulator chamber **315** is permitted by the check valve end **410** of the control valve **400**. Unlocking of the accumulator piston **320** during the main engine valve event may occur as a result of either communication between the slave piston passage **317** and the secondary vent passage **228**, or the high speed actuation of the spool valve **412** with an mechanical, electro-mechanical, electro-magnetic, pneumatic, or hydraulic actuator. The secondary vent passage **228** may communicate with the vent passage **226**.

The system shown in Fig. 2 (as well as that shown in Figs. 3 and 5) may also benefit from the isolation of the spring **440** from the hydraulic pulses that may occur in the vent passage **226**.

A third embodiment of the present invention is shown in Fig. 3, in which like reference numerals refer to like elements. The operation of the system shown in Fig. 3 is similar to that of the system shown in Fig. 2. In Fig. 3, a spool valve **412** serves as the control valve **400**. The spool valve **412** provides communication with the slave piston bore **220** alternatively with a vent passage **226** (during positive power operation) or with a constant checked supply of low pressure oil from a low pressure passage **214** (during engine braking operation). When the spool valve **412** is in the position shown, the accumulator piston **320** is free to be displaced in the accumulator chamber **315** as the result of high pressure received through the passage **212**. Displacement of the accumulator piston **320** causes the oil in the chamber **315** to be vented through the vent passage **226**.

With continued reference to Fig. 3, compression-release braking operation may be provided by actuating the solenoid valve **234**, which in turn causes oil to flow through the passage **232** and displace the spool valve **412** downward. This displacement of the spool valve **412** blocks communication between the passage **222** and the vent passage **226**, and opens communication between the supply passage **214** and the passage **222**, thereby hydraulically locking the accumulator piston **320** into its upper position. One way flow of oil into the accumulator chamber **315** is permitted by the check valve **216**. Unlocking of the accumulator piston **320** during the main engine valve event may occur as a result of either communication between the slave piston passage **317** and the secondary vent passage **228**, or the high speed actuation of the spool valve **412** via high speed

actuation of the solenoid valve **234**. The secondary vent passage **228** may communicate with the vent passage **226**. The control valve **400** may either be a fast or slow acting mechanical, electro-mechanical, electro-magnetic, pneumatic, or hydraulic valve that controls the communication of the accumulator chamber **315** with the vent passage **226**.

A fourth embodiment of the present invention is shown in Fig. 4, in which like reference numerals refer to like elements. In this embodiment, the spool valve **412** alternatively connects the passage **222** (and thus the accumulator chamber **315**) to either the vent passage **226** or a high pressure hydraulic fluid supply passage **212**. The solenoid valve **234** may control the position of the spool valve **412**. When the solenoid valve **234** blocks the flow of hydraulic fluid into the control valve bore **230**, the spool valve **412** is biased upward and provides communication between the passage **222** and the vent passage **226**. When the solenoid valve **234** supplies hydraulic pressure, the spool valve **412** is biased down into the position shown so that the vent passage **226** is closed and the high-pressure passage **212** is placed in communication with the accumulator chamber **315**.

A fifth embodiment of the present invention is shown in Fig. 5, in which like reference numerals refer to like elements. With reference to Fig. 5, a spool valve **412** with a bleed fill may be provided. During engine braking operation, the spool valve **412** is displaced upward against the bias of the control valve spring **440**. In this position, the accumulator chamber **315** is permitted to vent through the vent passage **226** to either the atmosphere, or a second accumulator that is connected back to the high-pressure circuit, to aid in re-fill. During positive power operation, the spool valve **412** is positioned as shown so that the vent passage **226** is blocked. The accumulator chamber **315** may be filled by leakage from the high-pressure passage **212** past the accumulator piston **320**. This leakage fill feature is further enhanced by the incorporation of a constant bleed passage **322** (shown in Fig. 1) into the accumulator piston **320**.

With reference to Fig. 7, an accumulator control valve **400** configured in accordance with a seventh embodiment of the present invention is shown, in which like reference numerals refer to like elements. With reference to Fig. 7, the spool valve **412** may be controlled via the application of low pressure hydraulic fluid from the passage **232**. The spool valve **412** may provide the passage **222** (connected to the accumulator chamber **315**) with communication alternatively with the atmosphere through the vent plate **238** or with the checked low pressure supply via the check valve **216**. The passage **222** is offset from the passage **232** and the spool valve **412** is positioned so that the low pressure supply passage does not ever communicate with the vent plate **238**. As a result of the foregoing arrangement, the application of low pressure hydraulic fluid in the passage **232**

immediately causes the spool valve **412** to index upward and block communication between the passage **222** and the vent plate **238**. Fig. 7 shows the spool valve **412** in the position required for positive power operation (primary mode) of the lost motion system. Fig. 8 shows the same spool valve **412** as is shown in Fig. 7 in the position required for engine braking operation (secondary mode). The control valve **400** may either be a fast or slow acting mechanical, electro-mechanical, electro-magnetic, pneumatic, or hydraulic valve that controls the communication of the accumulator chamber **315** with the vent passage **226**.

With reference to Fig. 9, an accumulator control valve **400** configured in accordance with a sixth embodiment of the present invention is shown, in which like reference numerals refer to like elements. With reference to Fig. 9, the spool valve **412** may be controlled via the application of low pressure hydraulic fluid from the passage **232**. The spool valve **412** may provide the passage **222** (connected to the accumulator chamber **315**) with communication alternatively with the atmosphere through the vent plate **238** or with the checked low pressure supply via the check valve **216**. The passage **222** is located directly across from the passage **232**, which simplifies manufacturing of the system. The spool valve **412** is positioned so that the passage **232** communicates with the vent plate **238** when the spool valve is in an "off" position. As a result of the foregoing arrangement, the application of low pressure hydraulic fluid in the passage **232** does not immediately cause the spool valve **412** to index upward and block communication between the passage **222** and the vent plate **238**. Spool valve **412** indexes upward only after the combined flow of oil past the check valve **216** and the vent plate **238** backs up sufficiently to allow hydraulic pressure to build underneath the spool valve. Fig. 9 shows the spool valve **412** in the position required for positive power operation of the lost motion system. Fig. 10 shows the same spool valve **412** as is shown in Fig. 9, in the position required for engine braking operation. The control valve **400** may either be a fast or slow acting mechanical, electro-mechanical, electro-magnetic, pneumatic, or hydraulic valve that controls the communication of the accumulator chamber **315** with the vent passage **226**.

With reference to Fig. 11, an accumulator control valve **400** configured in accordance with a seventh embodiment of the present invention is shown, in which like reference numerals refer to like elements. With reference to Fig. 11, the slug **414** may be controlled via the application of low pressure hydraulic fluid from the passage **232**. The slug **414** may selectively block the flow of hydraulic fluid from the accumulator chamber **315** to the atmosphere through the vent plate **238**. Actuation of the control valve **400** occurs due to the combination of the length of the passage **232** that connects to the accumulator bore **220** and the restriction provided by the check valve **216** being

sufficient to delay the actuation of the slave piston body until after the slug **414** is indexed upward to block the vent plate **238**. Fig. 11 shows the slug **414** in the position required for positive power operation of the lost motion system. Fig. 12 shows the same slug **414** as is shown in Fig. 11, in the position required for engine braking operation. The control valve **400** may either be a fast or slow acting mechanical, electro-mechanical, electro-magnetic, pneumatic, or hydraulic valve that controls the communication of the accumulator chamber **315** with the vent passage **226**.

In accordance with variations of the present invention, an accumulator vent passage may be placed in communication with the high pressure circuit in the lost motion system **10** through the motion of the slave piston **310**, which contains a window to either the atmosphere, or a second accumulator that is connected back to the high-pressure circuit, to aid in re-fill. With reference to Fig. 14, in an alternative embodiment of the invention, an accumulator vent passage may be exposed through the motion of the master piston **120**, which contains a window to either the atmosphere or a second accumulator that is connected back to the high-pressure circuit, to aid in re-fill. This may effectively reset the engine valve **500**.

Figs. 15 and 16 show the slave piston **300** and control valve **400** arrangement of Fig. 4 arranged in a rocker arm **600**. Fig. 15 also illustrates the use of a preferred accumulator piston **320** that includes a piston head **324** and a piston stem **326**, and dual accumulator springs **330** and **332**. The operation of the slave piston **300** and the control valve **400** is the same as that described in connection with Fig. 4 except that the downward force applied to the slave piston is provided by the rotation of the rocker arm **600** in the system shown in Figs. 15 and 16, as opposed to the master piston **120** in the system of Figs. 1 and 4. It is appreciated that any of the slave piston/control valve arrangements shown in Figs. 1-5 and 7-14 may be integrated into a rocker arm as shown in Figs. 15 and 16. The control valve **400** may either be a fast or slow acting mechanical, electro-mechanical, electro-magnetic, pneumatic, or hydraulic valve that controls the communication of the accumulator chamber **315** with the vent passage **226**.

Fig. 17-19 show the slave piston **300** and control valve **400** arrangement of Fig. 1 arranged in a rocker arm **600**.

It will be apparent to those skilled in the art that various modifications and variations can be made in the construction, configuration, and/or operation of the present invention without departing from the scope or spirit of the invention. For example, in the embodiments mentioned above, various changes may be made to the accumulator without departing from the scope and spirit of the invention. Further, it may be appropriate to make additional modifications or changes to the

hydraulic system without departing from the scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of the invention provided they come within the scope of the appended claims and their equivalents.

What is Claimed:

1. An actuating system for operating at least one valve of an engine during a plurality of engine operating modes, said system comprising:

energy means for supplying energy to operate the at least one valve during the plurality of engine operating modes;

valve actuation means for actuating the at least one valve during said the plurality of engine operating modes;

energy transfer means for transferring energy from said energy means to said valve actuation means; and

control means for controlling the amount of energy transferred from said energy means to said valve actuation means to control the actuation of the at least one valve during the plurality of engine operating modes.

2. The actuating system according to Claim 1, wherein said valve actuation means, said energy transfer means and said control means cooperate to provide lost motion valve actuation of the at least one valve.

3. The actuating system according to Claim 1, wherein said energy transfer means transfers all of the energy derived from said energy supply means during one operating mode.

4. The actuating system according to Claim 3, wherein said one operating mode is an auxiliary operating mode.

5. The actuating system according to Claim 3, wherein said energy transfer means transfers a portion of the energy derived from said energy supply means during a second operating mode.

6. The actuating system according to Claim 1, wherein said valve actuation means includes an accumulator piston slidably disposed in a slave piston.

7. The actuating system according to Claim 1, wherein said valve actuation means includes a selectively actuatable accumulator.

8. The actuating system according to Claim 7, wherein said valve actuation means, said energy transfer means and said control means cooperate to provide lost motion valve actuation of the at least one engine valve.

9. The actuating system according to Claim 7, wherein said selectively actuatable accumulator is in a locked position during one operating mode such that substantially all of the energy from the energy means is transferred to said valve actuation means.

10. The actuating system according to Claim 9, wherein said selectively actuatable accumulator has a fixed volume.

11. The actuating system according to Claim 6, wherein said accumulator piston includes a piston head and a piston stem.

12. The actuating system according to Claim 8, wherein said selectively actuatable accumulator is in an unlocked position during one operating mode such that only a portion of the energy from the energy means is transferred to said valve actuation means.

13. The actuating system according to Claim 6, further comprising a bleed passage extending through the accumulator piston.

14. The actuating system according to Claim 7, wherein said control means includes supply means for supplying a fluid to said selectively actuatable accumulator.

15. The actuating system according to Claim 7, wherein said control means further includes venting means for venting the fluid from said selectively actuatable accumulator at a predetermined time.

16. The actuating system according to Claim 7, wherein said selectively actable accumulator is incorporated into a piston assembly.

17. The actuating system according to Claim 7, wherein said selectively actable accumulator is incorporated into a piston assembly, and wherein said control means further includes venting means for venting the fluid from said selectively actuatable accumulator at a predetermined position of said piston assembly.

18. The actuating system according to Claim 16, wherein said selectively actuatable accumulator has a fixed volume.

19. The actuating system according to Claim 14, wherein said supply means supplies fluid to said selectively actuatable accumulator to maintain said accumulator in a locked position in one operating mode.

20. The actuating system according to Claim 1, wherein said valve actuation means includes a disk-shaped accumulator piston slidably disposed in a slave piston.

21. The actuating system according to Claim 1, wherein said control means comprises a spool valve.

22. The actuating system according to Claim 21, wherein said spool valve includes an internal check valve.

23. The actuating system according to Claim 21. further comprising a spring biasing said spool valve into a position for positive power engine valve operation.

24. The actuating system according to Claim 21, wherein said control means further comprises a check valve located externally of said spool valve.

25. The actuating system according to Claim 21, wherein said control means further includes selectively operable fluid supply means for selectively supplying fluid to said supply means.

26. The actuating system according to Claim 23, wherein said control means further comprises an hydraulic vent, and wherein said biasing spring is isolated from hydraulic fluid flow through said vent.

27. The actuating system according to Claim 21, wherein said control means further includes a solenoid operated valve for selectively controlling fluid supply to said spool valve.

28. The actuating system according to Claim 21, wherein said valve actuation means includes an accumulator piston slidably disposed in a slave piston.

29. The actuating system according to Claim 28, wherein said accumulator piston comprises a piston head and a piston stem.

30. The actuating system according to Claim 29, further comprising at least one spring disposed between said accumulator piston and said slave piston.

31. The actuating system according to Claim 29, further comprising a bleed passage extending through the accumulator piston.

32. The actuating system according to Claim 21, wherein said control means further includes venting means for venting a predetermined amount of fluid from said valve actuation means at predetermined times during the plurality of engine operating conditions.

33. The actuating system according to Claim 32, wherein said valve actuation means comprises a piston assembly disposed in a bore, a selectively actuatable accumulator disposed in the piston assembly, and wherein said venting means vents the fluid from said selectively actuatable accumulator at a predetermined position of said piston assembly in the bore.

34. The actuating system according to Claim 1, wherein said energy transfer means comprises an hydraulic link between a master piston and a slave piston.

35. The actuating system according to Claim 1, wherein said energy transfer means comprises a rocker arm and said valve actuation means comprises the combination of a slave piston and stem-shaped accumulator piston.

36. The actuating system according to Claim 32, further comprising a fluid recovery system, and wherein said venting means vents said fluid to the fluid recovery system.

37. The actuating system according to Claim 36, wherein said fluid recovery system is connected to an additional accumulator assembly.

38. The actuating system according to Claim 36, wherein said fluid recovery system is connected to said supply means.

39. The actuating system according to Claim 36, wherein said fluid recovery system is connected to a reservoir.

40. The actuating system according to Claim 36, wherein said fluid recovery system is connected to a supplemental fluid supply.

41. The actuating system according to Claim 21, wherein said energy transfer means comprises a rocker arm, and wherein said spool valve is disposed within said rocker arm and wherein said spool valve incorporates a check valve.

42. The actuating system according to Claim 41, further comprising a spring positioned to bias said spool valve into an open position.

43. The actuating system according to Claim 41, wherein said control means further comprises a check valve disposed within said rocker arm and located externally of said spool valve.

44. The actuating system according to Claim 41, further comprising a spring biasing said spool valve into a position for positive power engine valve operation..

45. The actuating system according to Claim 41, wherein said control means further includes selectively operable fluid supply means for selectively supplying fluid to said supply means.

46. The actuating system according to Claim 44, wherein said control means further comprises an hydraulic vent, and wherein said biasing spring is isolated from hydraulic fluid flow through said vent.

47. The actuating system according to Claim 41, wherein said control means further includes a solenoid operated valve for selectively controlling fluid supply to said spool valve.

48. The actuating system according to Claim 41, wherein said valve actuation means includes an accumulator piston slidably disposed in a slave piston.

49. The actuating system according to Claim 48, wherein said accumulator piston comprises a piston head and a piston stem.

50. The actuating system according to Claim 49, further comprising at least one spring disposed between said accumulator piston and said slave piston.

51. The actuating system according to Claim 49, further comprising a bleed passage extending through the accumulator piston.

52. The actuating system according to Claim 41, wherein said control means further includes venting means for venting a predetermined amount of fluid from said valve actuation means at predetermined times during the plurality of engine operating conditions.

53. The actuating system according to Claim 52, wherein said valve actuation means comprises a piston assembly disposed in a bore, a selectively actuatable accumulator disposed in the piston assembly, and wherein said venting means vents the fluid from said selectively actuatable accumulator at a predetermined position of said piston assembly in the bore.

54. The actuating system according to Claim 41, wherein said valve actuation means comprises a selectively actuatable accumulator.

55. The actuating system according to Claim 1, wherein said energy supply means comprises a cam assembly.

56. The actuating system according to Claim 55, wherein said energy transfer means includes a piston assembly, wherein said control means includes a selectively actuatable accumulator, said actuatable accumulator being located within said piston assembly.

57. The actuating system according to Claim 56, wherein said valve actuation means, said energy transfer means and said control means cooperate to provide lost motion valve actuation of the at least one valve.

58. The actuating system according to Claim 57, wherein said selectively actuatable accumulator is in a locked position during one operating mode.

59. The actuating system according to Claim 58, wherein said one operating mode is one of a primary operating mode and an auxiliary operating mode.

60. The actuating system according to Claim 1, wherein said valve actuation means includes a piston assembly and said energy transfer means includes a hydraulic circuit, wherein said control means includes a selectively actuatable accumulator, said actuatable accumulator being located within said slave piston assembly.

61. The actuating system according to Claim 60, wherein said valve actuation means, said energy transfer means and said control means cooperate to provide lost motion valve actuation of the at least one valve.

62. The actuating system according to Claim 60. wherein said selectively actuatable accumulator is in a locked position during one operating mode.

63. The actuating system according to Claim 60, wherein said one operating mode is one of a primary operating mode and an auxiliary operating mode.

64. The actuating system according to Claim 1, wherein said energy transfer means includes a first piston assembly and a hydraulic fluid circuit, and said valve actuation means. includes a second piston assembly, wherein said control means includes a selectively actuatable accumulator, said actuatable accumulator being located within said hydraulic fluid circuit between said first piston assembly and said second piston assembly.

65. The actuating system according to Claim 1, wherein said energy transfer means comprises a rocker arm and an hydraulic fluid circuit integrated therein, and said valve actuation means includes a piston assembly integrated into said rocker arm, said piston assembly including a stem-shaped piston.

66. The actuating system according to Claim 64, wherein said selectively actuatable accumulator is in a locked position during one operating mode.

67. The actuating system according to Claim 65, wherein said stem-shaped piston is in a locked position during one operating mode.

68. The actuating system according to Claim 1, wherein said energy transfer means is connected to said valve actuation means, said energy transfer means having a first piston assembly located therein, and said valve actuation assembly having a second piston assembly located therein.

69. The actuating system according to Claim 68, wherein said valve actuation means, said energy transfer means and said control means cooperate to provide lost motion valve actuation of the at least one valve.

70. The actuating system according to Claim 68, wherein at least a portion of said control means is located within said energy transfer means between said first and second pistons.

71. The actuating system according to Claim 70, wherein said control means includes a third piston assembly, wherein said third piston assembly is located intermediate of said first and second piston.

72. The actuating system according to Claim 68, further comprising:

clipping means for clipping movement of one of said first and second pistons.

73. The actuating system according to Claim 1, wherein said valve actuation means, said energy transfer means and said control means are positioned within a rocker arm assembly.

74. The actuating system according to Claim 73, wherein said valve actuation means, said energy transfer means and said control means cooperate to provide lost motion valve actuation of the at least one valve.

75. The actuating system according to Claim 74, wherein said control means includes a selectively actuatable accumulator for controlling the amount of energy transferred to said valve actuation means during the plurality of engine operating conditions.

76. The actuating system according to Claim 75, wherein said control means includes supply means for supplying a fluid to said selectively actuatable accumulator.

77. The actuating system according to Claim 76, wherein said control means further includes venting means for venting the fluid from said selectively actuatable accumulator at a predetermined time.

78. The actuating system according to Claim 77, wherein said venting means vents said fluid to a fluid recovery system.

79. The actuating system according to Claim 78, wherein said fluid recovery system is connected to an additional accumulator assembly.

80. The actuating system according to Claim 78, wherein said fluid recovery system is connected to said supply means.

81. The actuating system according to Claim 78, wherein said fluid recovery system is connected to a reservoir.

82. The actuating system according to Claim 78, wherein said fluid recovery system is connected to a supplemental fluid supply.

83. The actuating system according to Claim 82, wherein said supply means further includes supply control means for controlling the supply of fluid to said selectively actuatable accumulator.

84. The actuating system according to Claim 83, wherein said supply control means includes a valve assembly to control the supply of fluid to said selectively actuatable accumulator.

85. The actuating system according to Claim 84, wherein said supplemental fluid supply is selectively operable to control said valve assembly.

86. The actuating system according to Claim 1, wherein said valve actuation means, said energy transfer means and said control means are positioned within a hydraulic overhead assembly.

87. The actuating system according to Claim 86, wherein said valve actuation means, said energy transfer means and said control means cooperate to provide lost motion valve actuation of the at least one valve.

88. The actuating system according to Claim 87, wherein said control means includes a selectively actuatable accumulator for controlling the amount of energy transferred to said valve actuation means during the plurality of engine operating modes.

89. The actuating system according to Claim 88, wherein said control means includes supply means for supplying a fluid to said selectively actuatable accumulator.

90. The actuating system according to Claim 89, wherein said control means further includes venting means for venting the fluid from said selectively actuatable accumulator at a predetermined time.

91. The actuating system according to Claim 90, wherein said venting means vents said fluid to a fluid recovery system.

92. The actuating system according to Claim 91, wherein said fluid recovery system is connected to an additional accumulator assembly.

93. The actuating system according to Claim 91, wherein said fluid recovery system is connected to said supply means.

94. The actuating system according to Claim 91, wherein said fluid recovery system is connected to a reservoir.

95. The actuating system according to Claim 91, wherein said fluid recovery system is connected to a supplemental fluid supply.

96. The actuating system according to Claim 95, wherein said supply means further includes supply control means for controlling the supply of fluid to said selectively actuatable accumulator.

97. The actuating system according to Claim 96, wherein said supply control means includes a valve assembly to control the supply of fluid to said selectively actuatable accumulator.

98. The actuating system according to Claim 97, wherein said supplemental fluid supply is selectively operable to control said valve assembly.

99. The actuating system according to Claim 1, wherein said valve actuation means includes a means for automatically taking up lash.

100. In an hydraulic valve actuation system for operating at least one valve of an engine during a plurality of engine operating conditions, wherein the valve actuation system includes a cam assembly having a plurality of lobes formed thereon for supplying motion to operate the at least one valve during the plurality of engine operating conditions, a valve actuating assembly having a first piston assembly for actuating the at least one valve, and a motion transfer assembly having a second

piston assembly and a hydraulic circuit for transferring the motion from said cam assembly to said first piston assembly, the improvement comprising:

control means for controlling the amount of motion transferred from said motion transfer assembly to said first piston assembly to control the actuation of the at least one valve during the plurality of engine operating conditions.

101. The valve actuation system according to Claim 100, wherein said control means includes a selectively actuatable accumulator for controlling the amount of motion transferred to said first piston assembly during the plurality of engine operating conditions.

102. The valve actuation system according to Claim 101, wherein said selectively actuatable accumulator is in a locked position during one operating mode such that all of the motion from said cam assembly is transferred to said slave piston assembly.

103. The valve actuation system according to Claim 102, wherein said selectively actuatable accumulator has a fixed volume.

104. The valve actuation system according to Claim 102, wherein said selectively actuatable accumulator is in an unlocked position during another operating mode such that only a portion of the motion from said cam assembly is transferred to said first piston assembly.

105. The valve actuation system according to Claim 104, wherein said control means includes supply means for supplying a fluid to said selectively actuatable accumulator.

106. The valve actuation system according to Claim 105, wherein said control means further includes venting means for venting a predetermined amount of fluid from said selectively actuatable accumulator at a predetermined time.

107. The valve actuation system according to Claim 105,wherein said control means further includes venting means for venting a predetermined amount of fluid from said selectively actuatable accumulator at a predetermined position of said first piston assembly.

108. The valve actuation system according to Claim 105,wherein said control means further includes venting means for venting a predetermined amount of fluid from said selectively actuatable accumulator at a predetermined position of said second piston assembly.

109. The valve actuation system according to Claim 105, wherein said supply means supplies fluid to said selectively actuatable accumulator to maintain said accumulator in a locked position in one operating mode.

110. The valve actuation system according to Claim 109, wherein said supply means further includes supply control means for controlling the supply of fluid to said selectively actuatable accumulator.

111. The valve actuation system according to Claim 110, wherein said control means further includes selectively operable fluid supply means for selectively supplying fluid to said supply means.

112. The valve actuation system according to Claim 111, wherein said selectively operable fluid supply means selectively operates said supply control means.

113. The valve actuation system according to Claim 111, wherein said control means further includes selectively operable fluid supply means for selectively operating said supply control means.

114. The valve actuation system according to Claim 113, wherein said selectively operable fluid supply means selectively supplies fluid to operate said supply control means.

115. The valve actuation system according to Claim 114, wherein said control means further includes venting means for venting a predetermined amount of fluid from said selectively actuatable accumulator at one of a predetermined time, a predetermined position of said master piston assembly and a predetermined position of said first piston assembly.

116. The valve actuation system according to Claim 115, wherein said supply control means includes a valve assembly to control the supply of fluid to said selectively actuatable accumulator and said venting means.

117. The valve actuation system according to Claim 115, wherein said venting means vents a predetermined amount of fluid from said supply means to release said selectively actuatable accumulator from said locked position.

118. The valve actuation system according to Claim 117, wherein said venting means vents a predetermined amount of fluid to the atmosphere during one operating mode.

119. The valve actuation system according to Claim 118, wherein said venting means vents a predetermined amount of fluid to a recovery system during one operating mode.

120. The valve actuation system according to Claim 118, wherein said venting means vents a predetermined amount of fluid to an additional accumulator assembly during one operating mode.

121. The valve actuation system according to Claim 100, wherein said control means includes a selectively actuatable accumulator, said actuatable accumulator being located within said second piston assembly.

122. The valve actuation system according to Claim 121, wherein said selectively actuatable accumulator is in a locked position during one operating mode.

123. The valve actuation system according to Claim 100, wherein said control means includes a selectively actuatable accumulator, said actuatable accumulator being located within said first piston assembly.

124. The valve actuation system according to Claim 123, wherein said selectively actuatable accumulator is in a locked position during one operating mode.

125. The valve actuation system according to Claim 100, wherein said control means includes a selectively actuatable accumulator, said actuatable accumulator being located within said hydraulic fluid circuit between said second piston assembly and said first piston assembly.

126. The valve actuation system according to Claim 125, wherein said selectively actuatable accumulator is in a locked position during one operating mode.

127. The valve actuation system according to Claim 100, wherein said valve actuating assembly, said motion transfer assembly and said control means cooperate to provide lost motion valve actuation of the at least one valve.

128. The valve actuation system according to Claim 100, wherein said valve actuation system provides for lashless valve actuation.

129. In an hydraulic valve actuation system, a method of controlling the amount of lost motion between an actuating assembly for actuating at least one valve and the at least one valve during a plurality of engine operating conditions, wherein the actuating assembly includes a cam assembly for providing motion to actuate at least one valve, a first piston assembly in communication with the cam assembly, a second piston assembly selectively in communication with the at least one valve for operating the at least one valve, and a hydraulic circuit communicating between the second piston assembly and the first piston assembly, said method comprising the steps of:

providing a selectively actuatable accumulator with the actuating assembly; and

supplying fluid to said selectively actuatable accumulator to establish a predetermined volume of fluid with said selectively actuatable accumulator.

130. A method for actuating at least one valve of an engine during a plurality of engine operating conditions, said method comprising the steps of:

supplying energy from an energy supply to operate the at least one valve during the plurality of engine operating conditions;

transferring energy from the energy supply to a valve actuation assembly to actuate the at least one valve; and

controlling the amount of energy transferred from the energy supply to the valve actuation assembly to control the actuation of the at least one valve during the plurality of engine operating conditions.

131. The method according to Claim 130, wherein said step of controlling the amount of energy transferred from the energy supply to the valve actuation assembly includes the step of selectively actuating an accumulator for controlling the amount of energy transferred to the valve actuation assembly.

132. The method according to Claim 131, further comprising the step of locking the accumulator during one operating mode such that all of the energy from the energy supply is transferred to the valve actuation assembly.

133. The method according to Claim 131, further comprising the step of unlocking the accumulator during one operating mode such that only a portion of the energy from the energy supply is transferred to the valve actuation assembly.

134. The method according to Claim 131, further comprising the step of controlling the supply of fluid to the accumulator.

135. The method according to Claim 131, further comprising the step of supplying a fluid to the accumulator to control the amount of energy transferred to the valve actuation assembly.

136. The method according to Claim 135, further comprising the step of venting the fluid from the accumulator at a predetermined time.

137. The method according to Claim 136, wherein the valve actuation assembly includes a piston assembly, and wherein said step of venting the fluid occurs at a predetermined position of the piston assembly.

138. The method according to Claim 135, wherein said step of transferring energy includes the step of providing an energy transfer assembly having a piston assembly and a hydraulic circuit for transferring energy from the energy supply to the valve actuation assembly, wherein said step of venting the fluid occurs at a predetermined position of the piston assembly.

139. The method according to Claim 135, wherein said step of venting includes the step of venting a predetermined amount of fluid to release the accumulator at predetermined engine operating conditions.

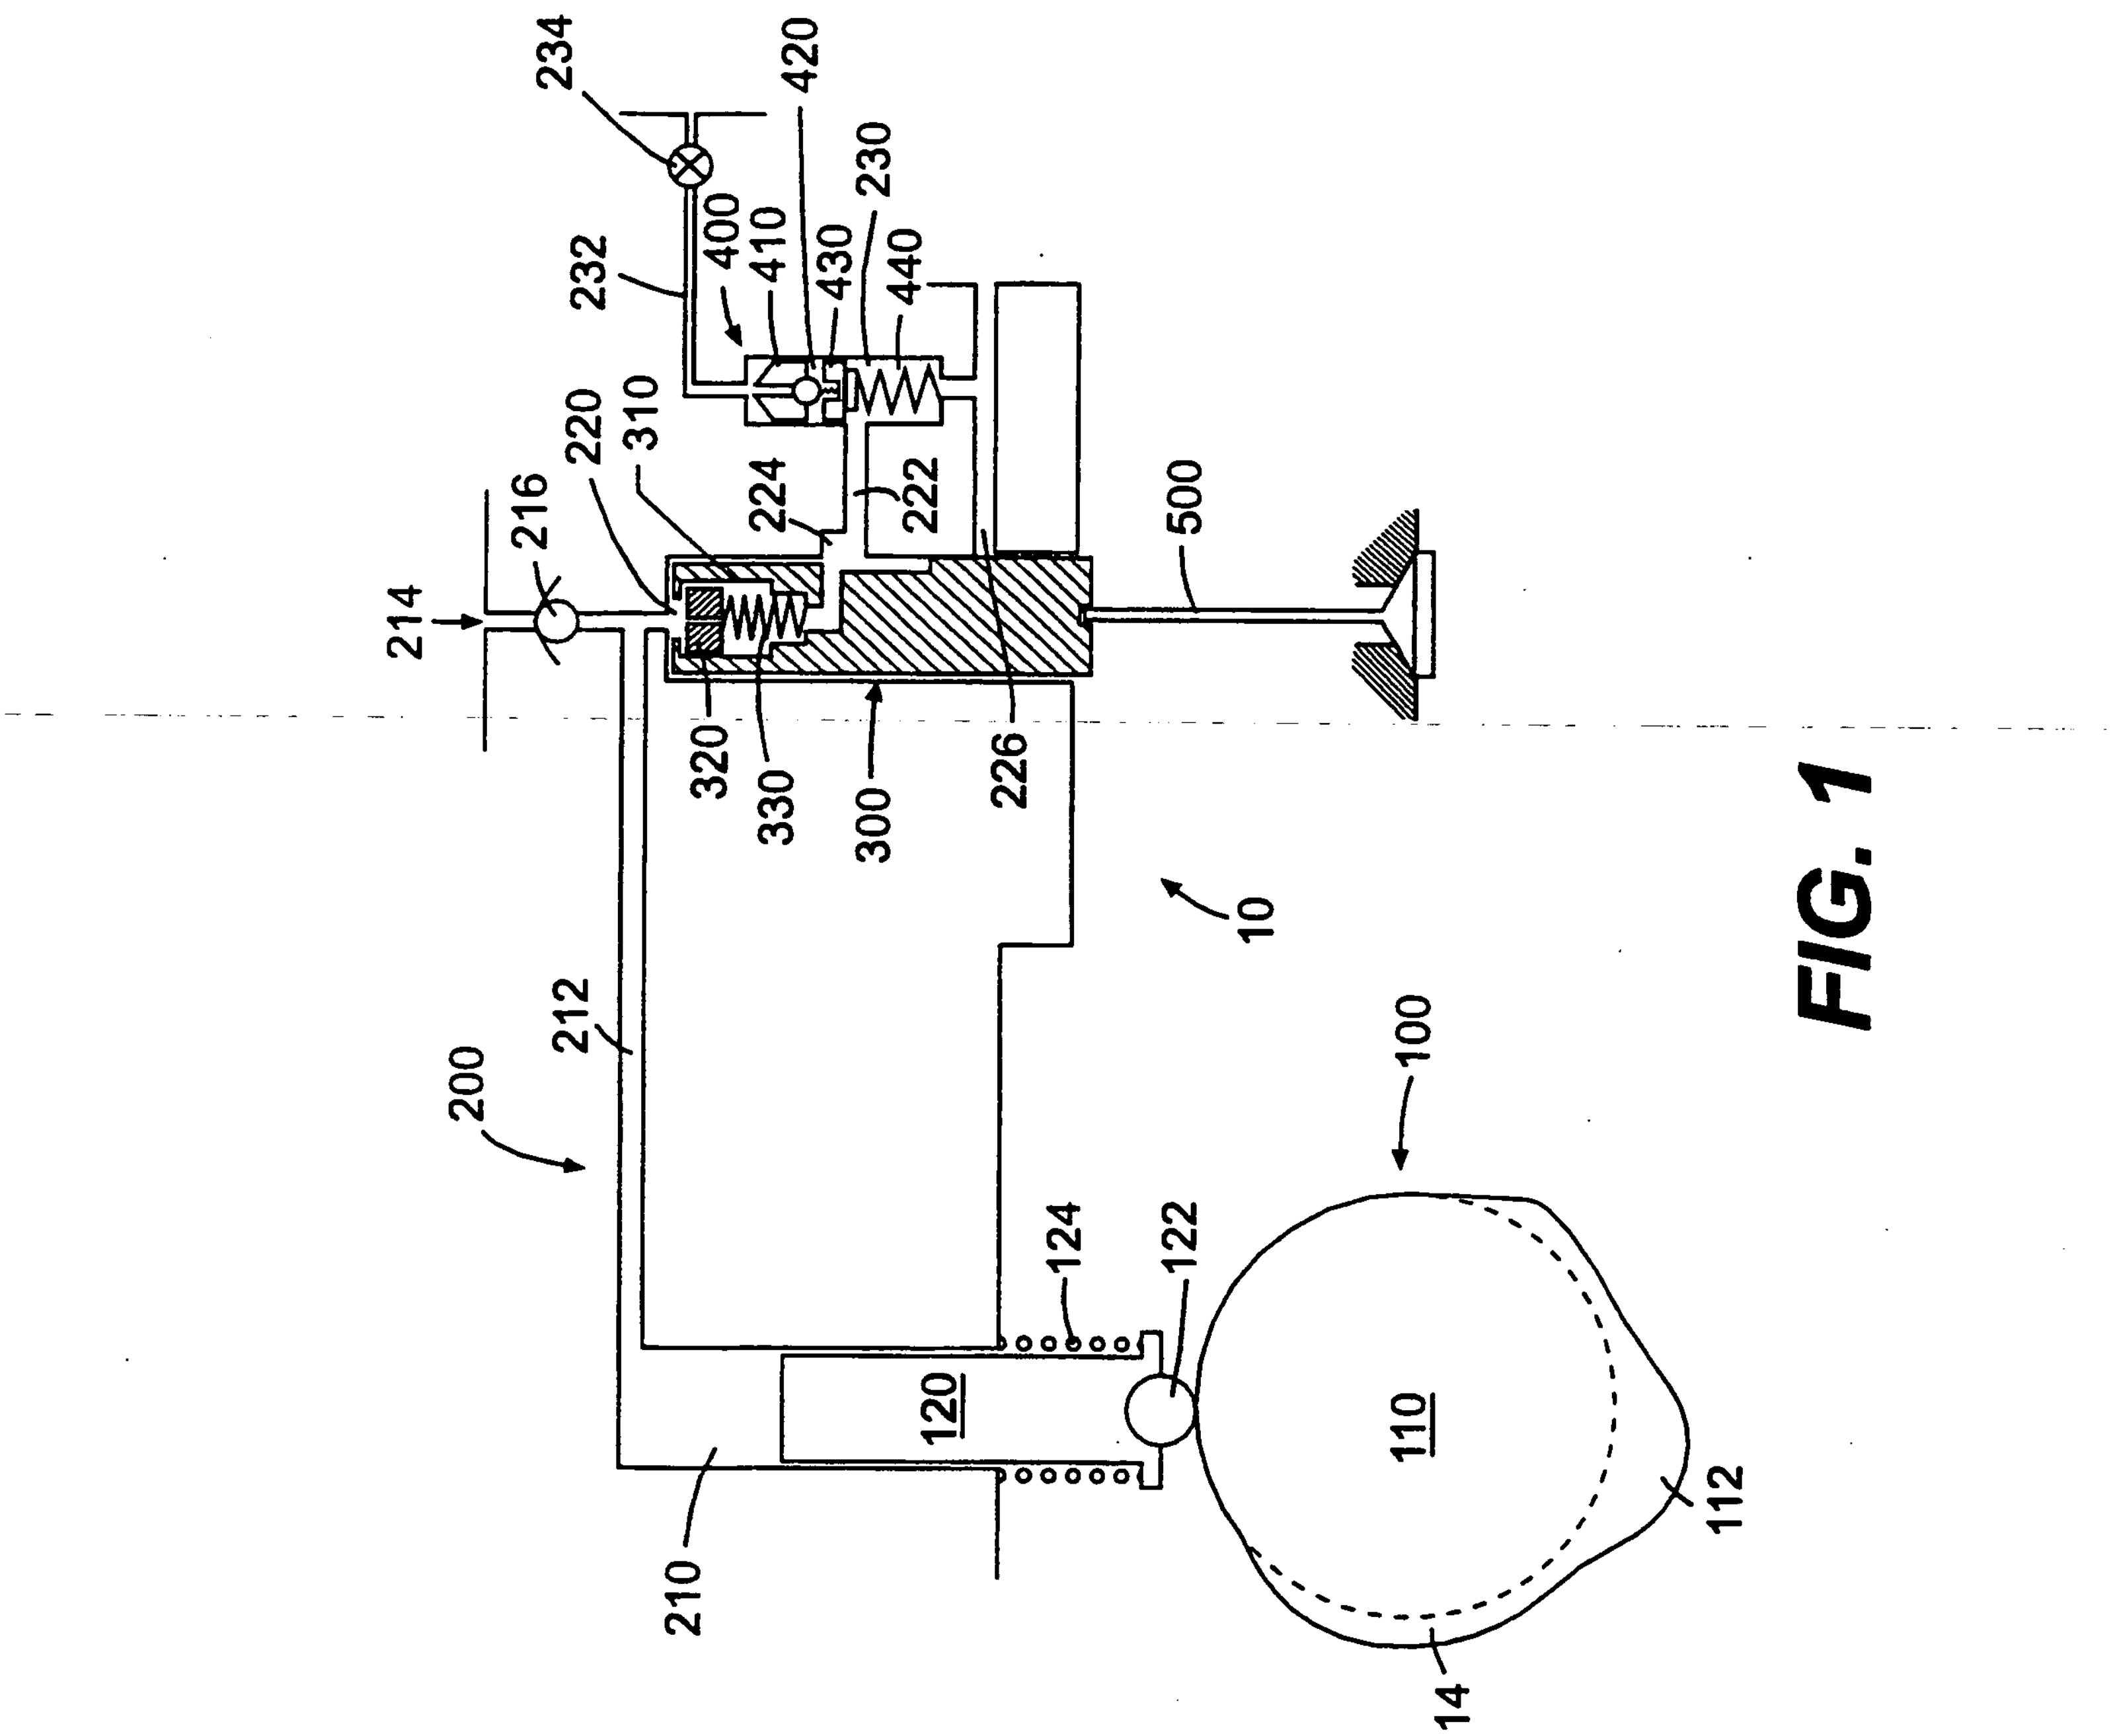
234
420
232
400
410
430
230
440
214
216
220
310
224
222
500
320
330
300
226
10
200
212
100
124
122
120
110
112
210
114

FIG. 1

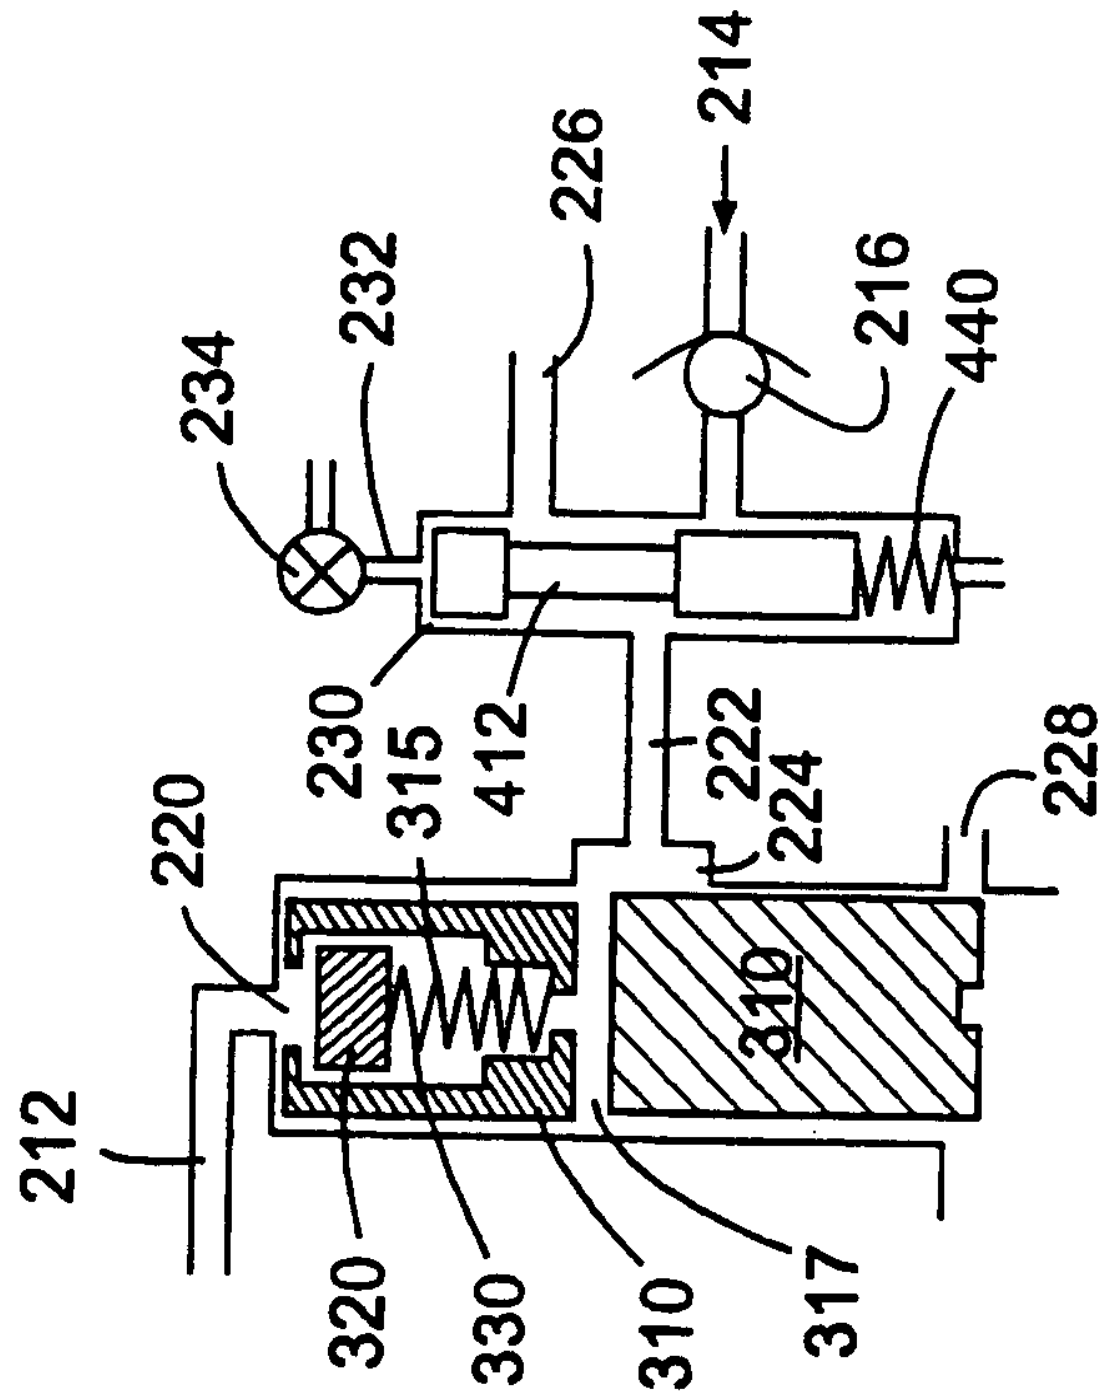
214
226
232
234
216
440
230
412
315
220
222
224
228
310
212
320
330
310
317

FIG. 3

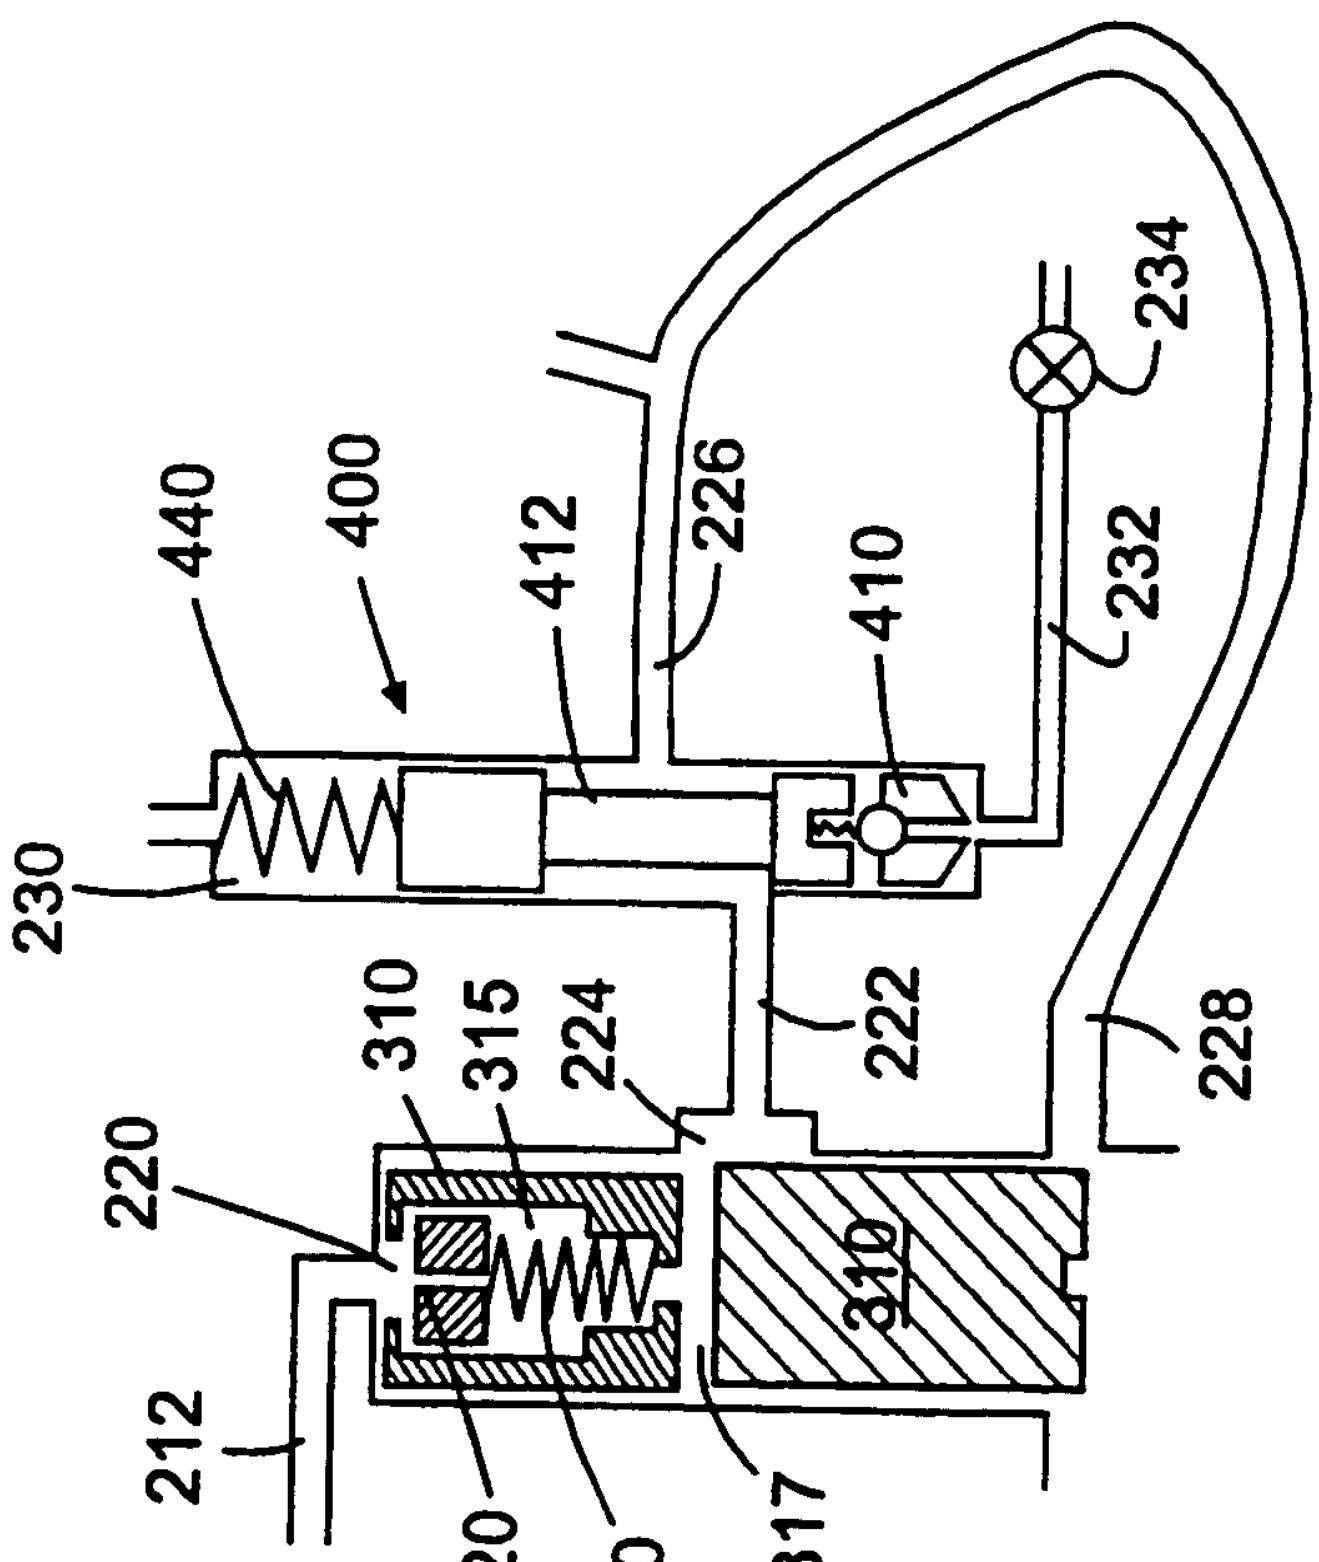
234
440
400
412
226
410
232
230
310
315
224
222
220
310
228
212
320
330
317

FIG. 2

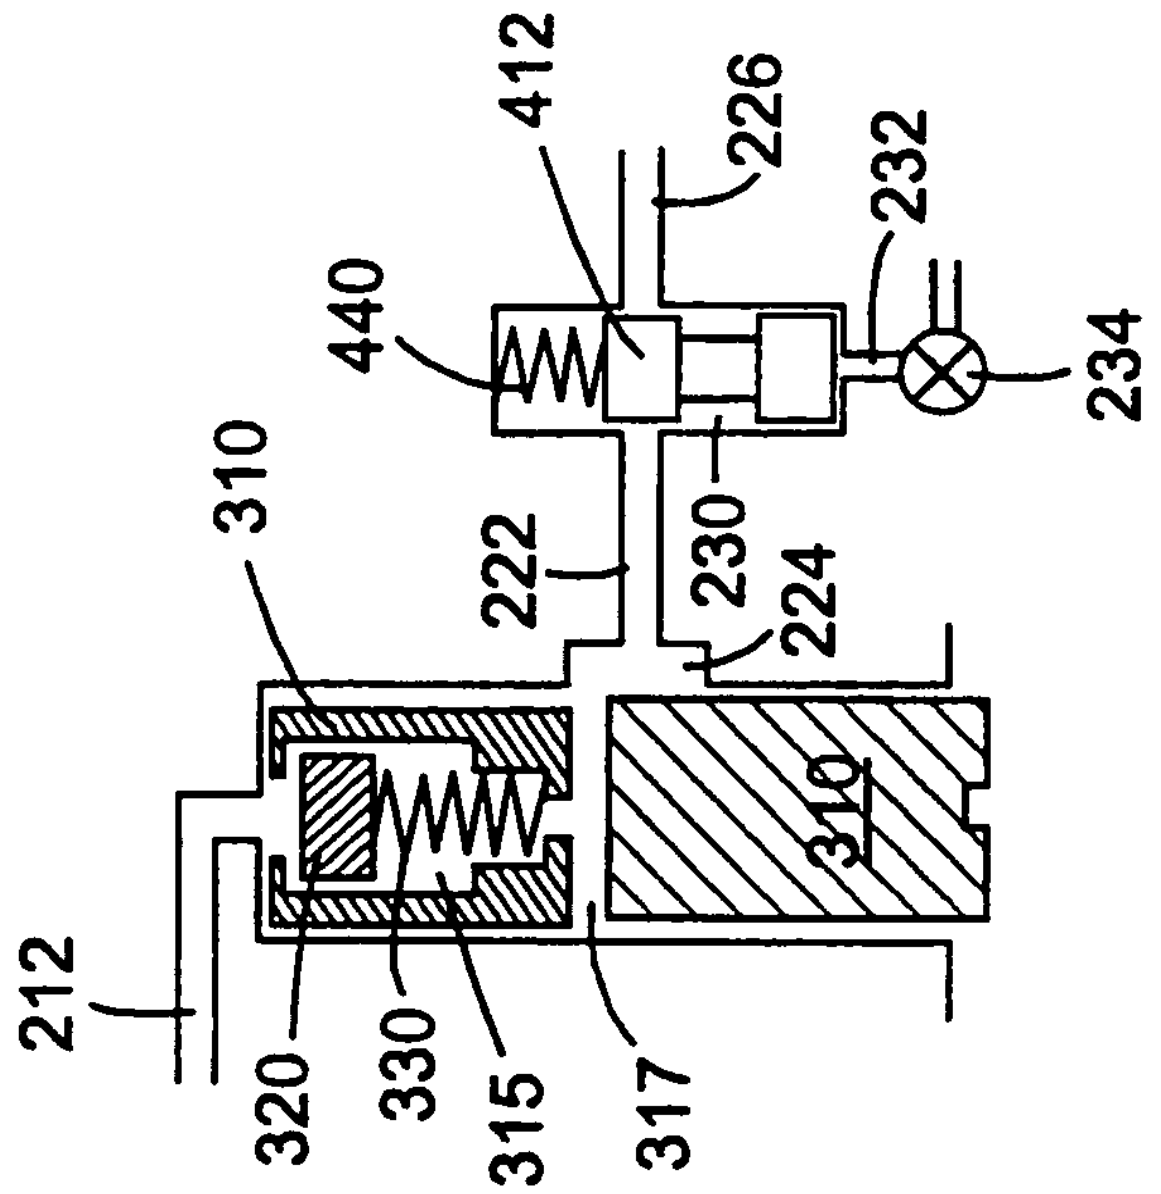
412
226
232
440
234
310
222
230
224
310
212
320
330
315
317

FIG. 5

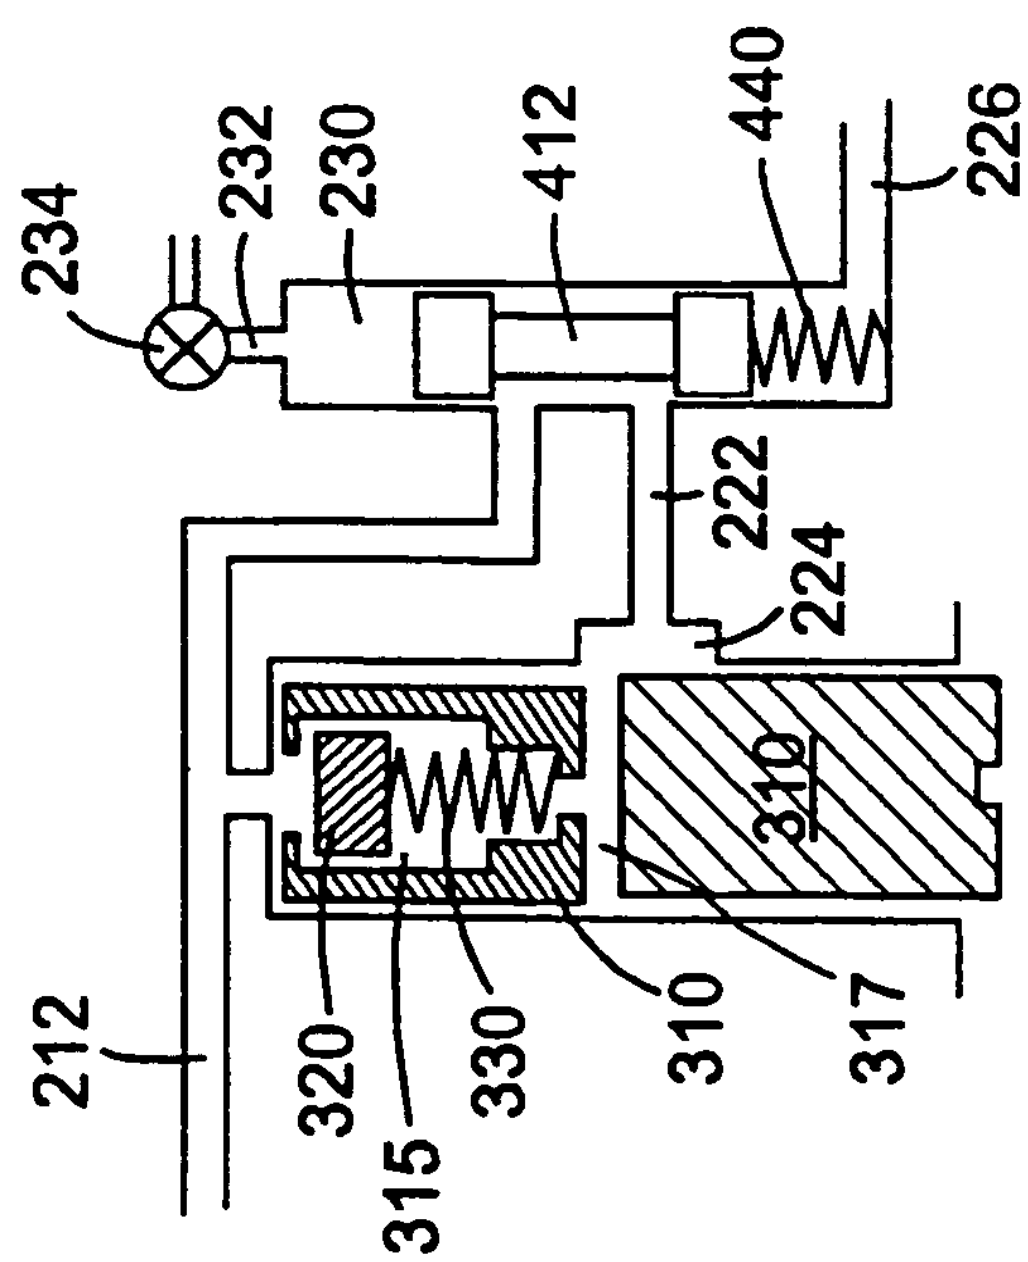
234
232
230
412
440
226
222
224
310
212
320
315
330
310
317

FIG. 4

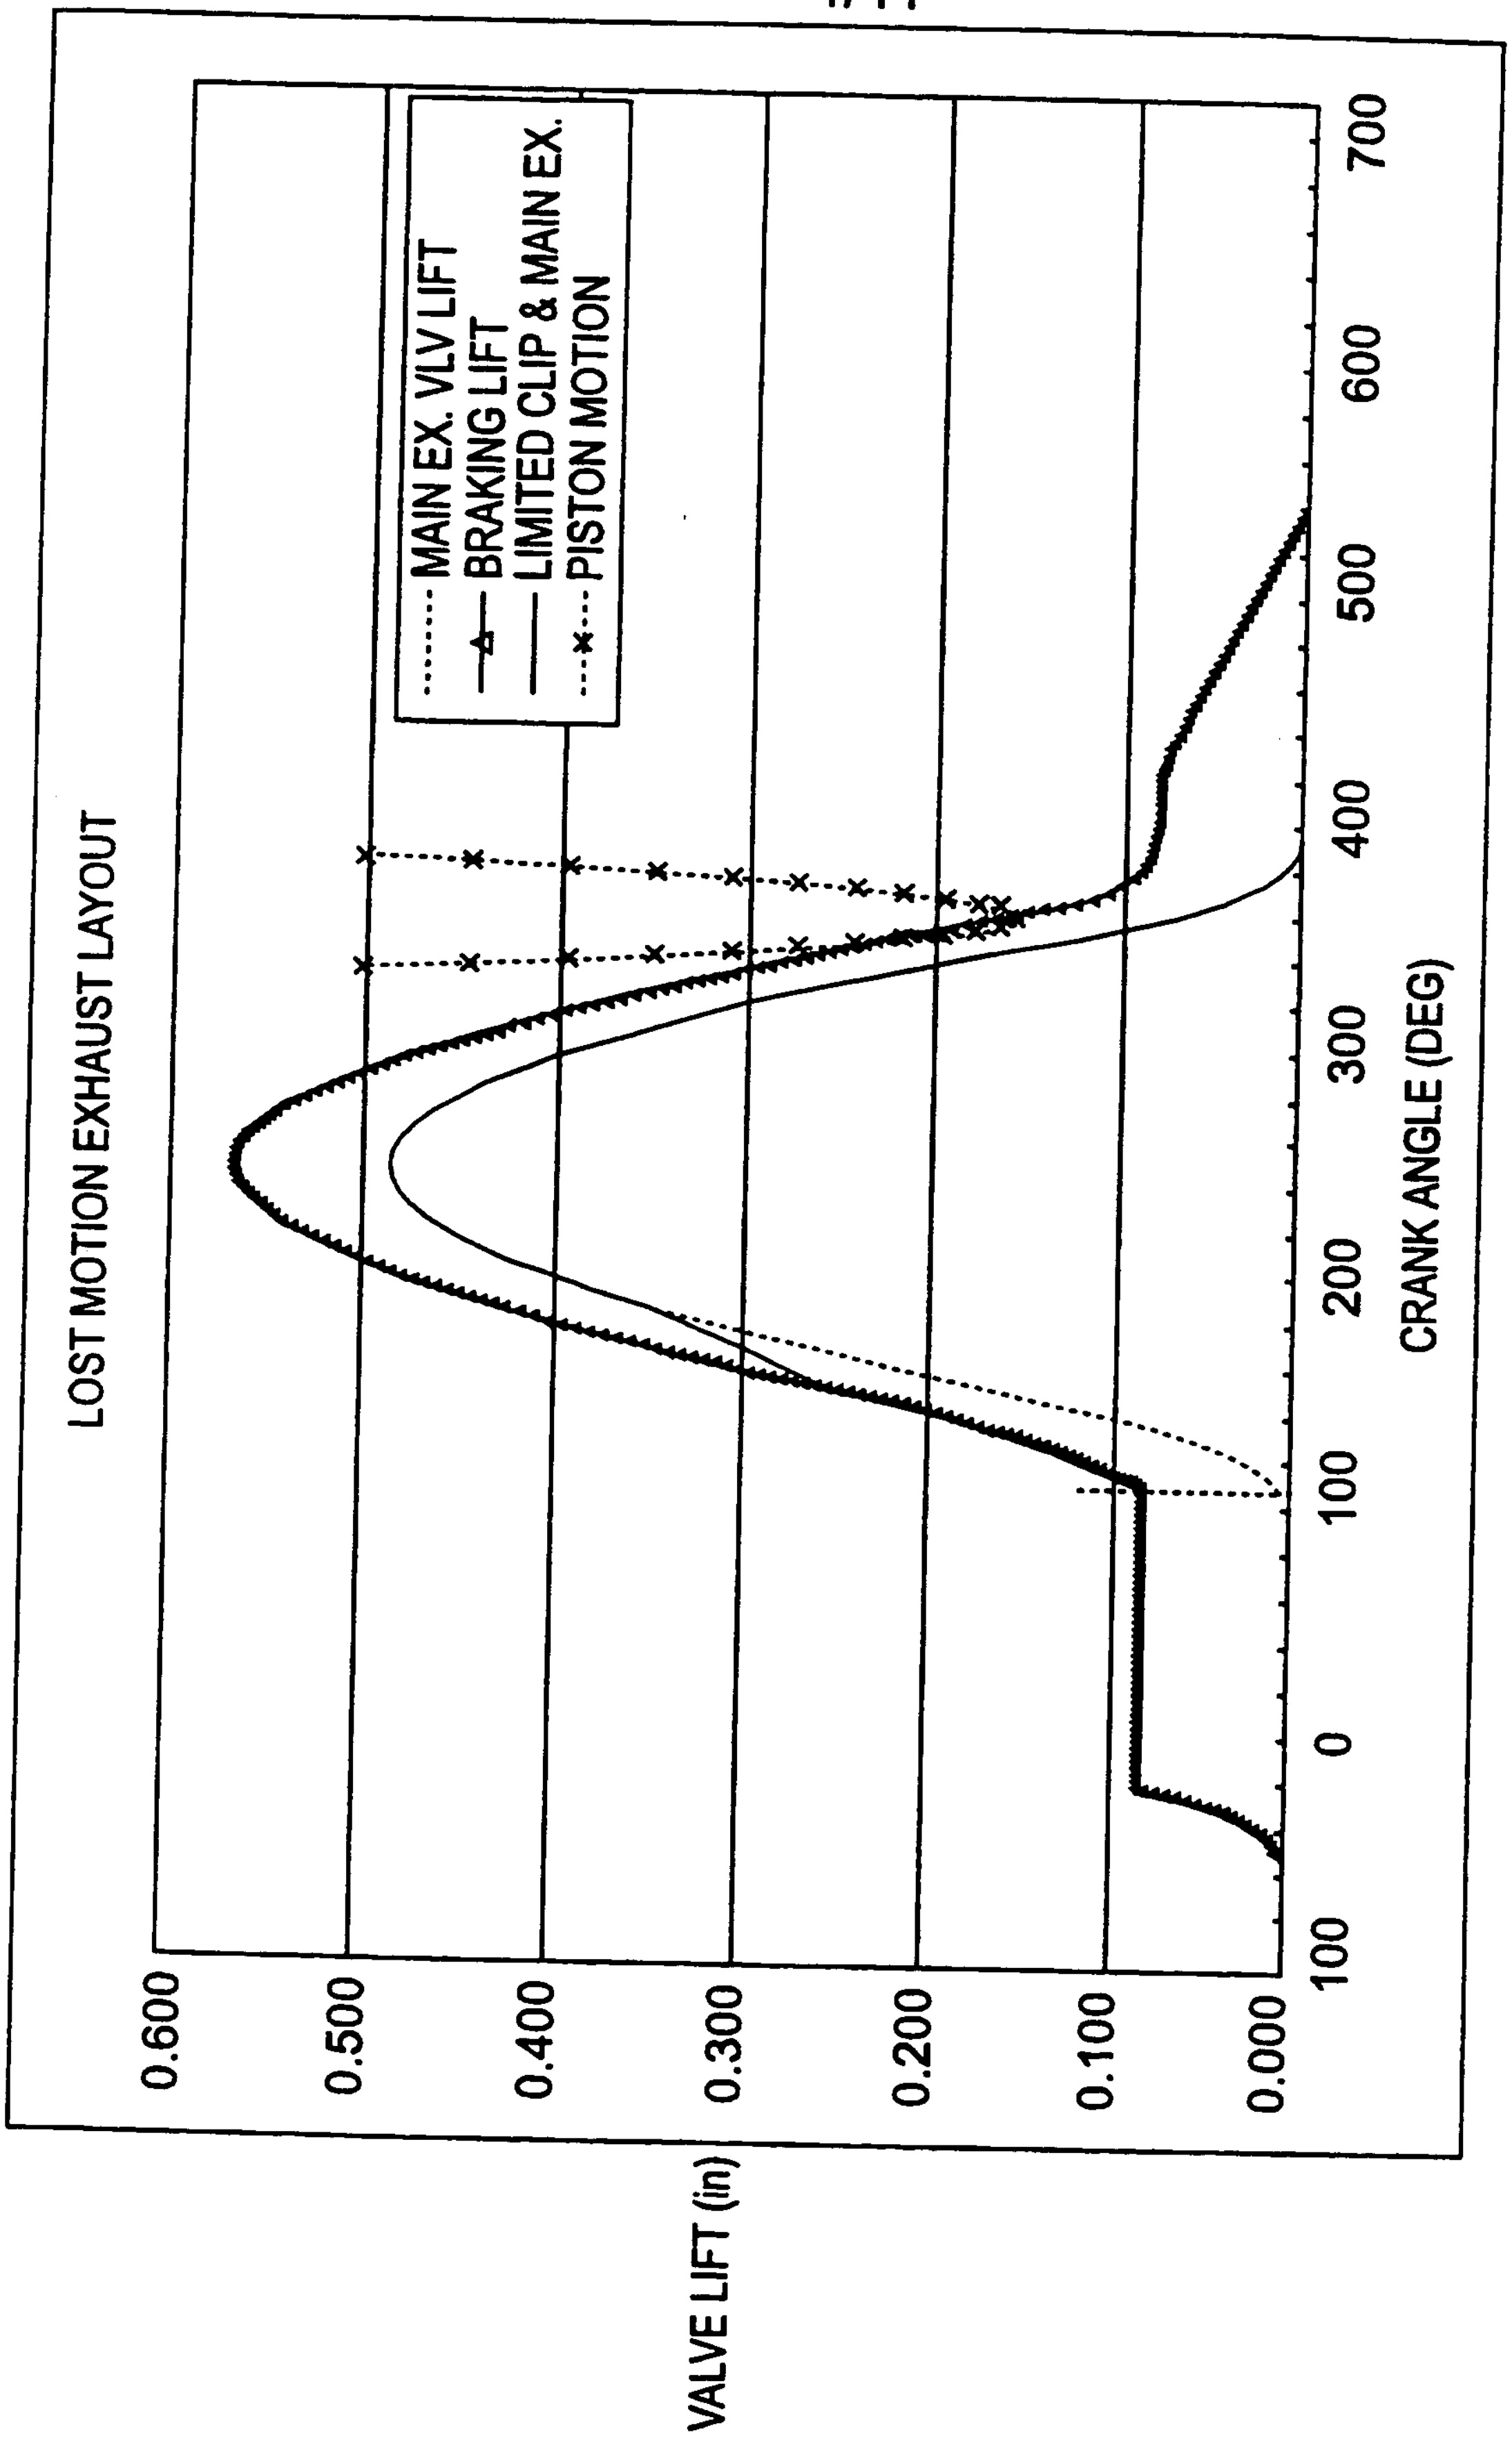
LOST MOTION EXHAUST LAYOUT
MAIN EX. VLV LIFT
BRAKING LIFT
LIMITED CLIP & MAIN EX.
PISTON MOTION
VALVE LIFT (in)
0.600
0.500
0.400
0.300
0.200
0.100
0.000
100
0
100
200
300
400
500
600
700
CRANK ANGLE (DEG)

FIG. 6

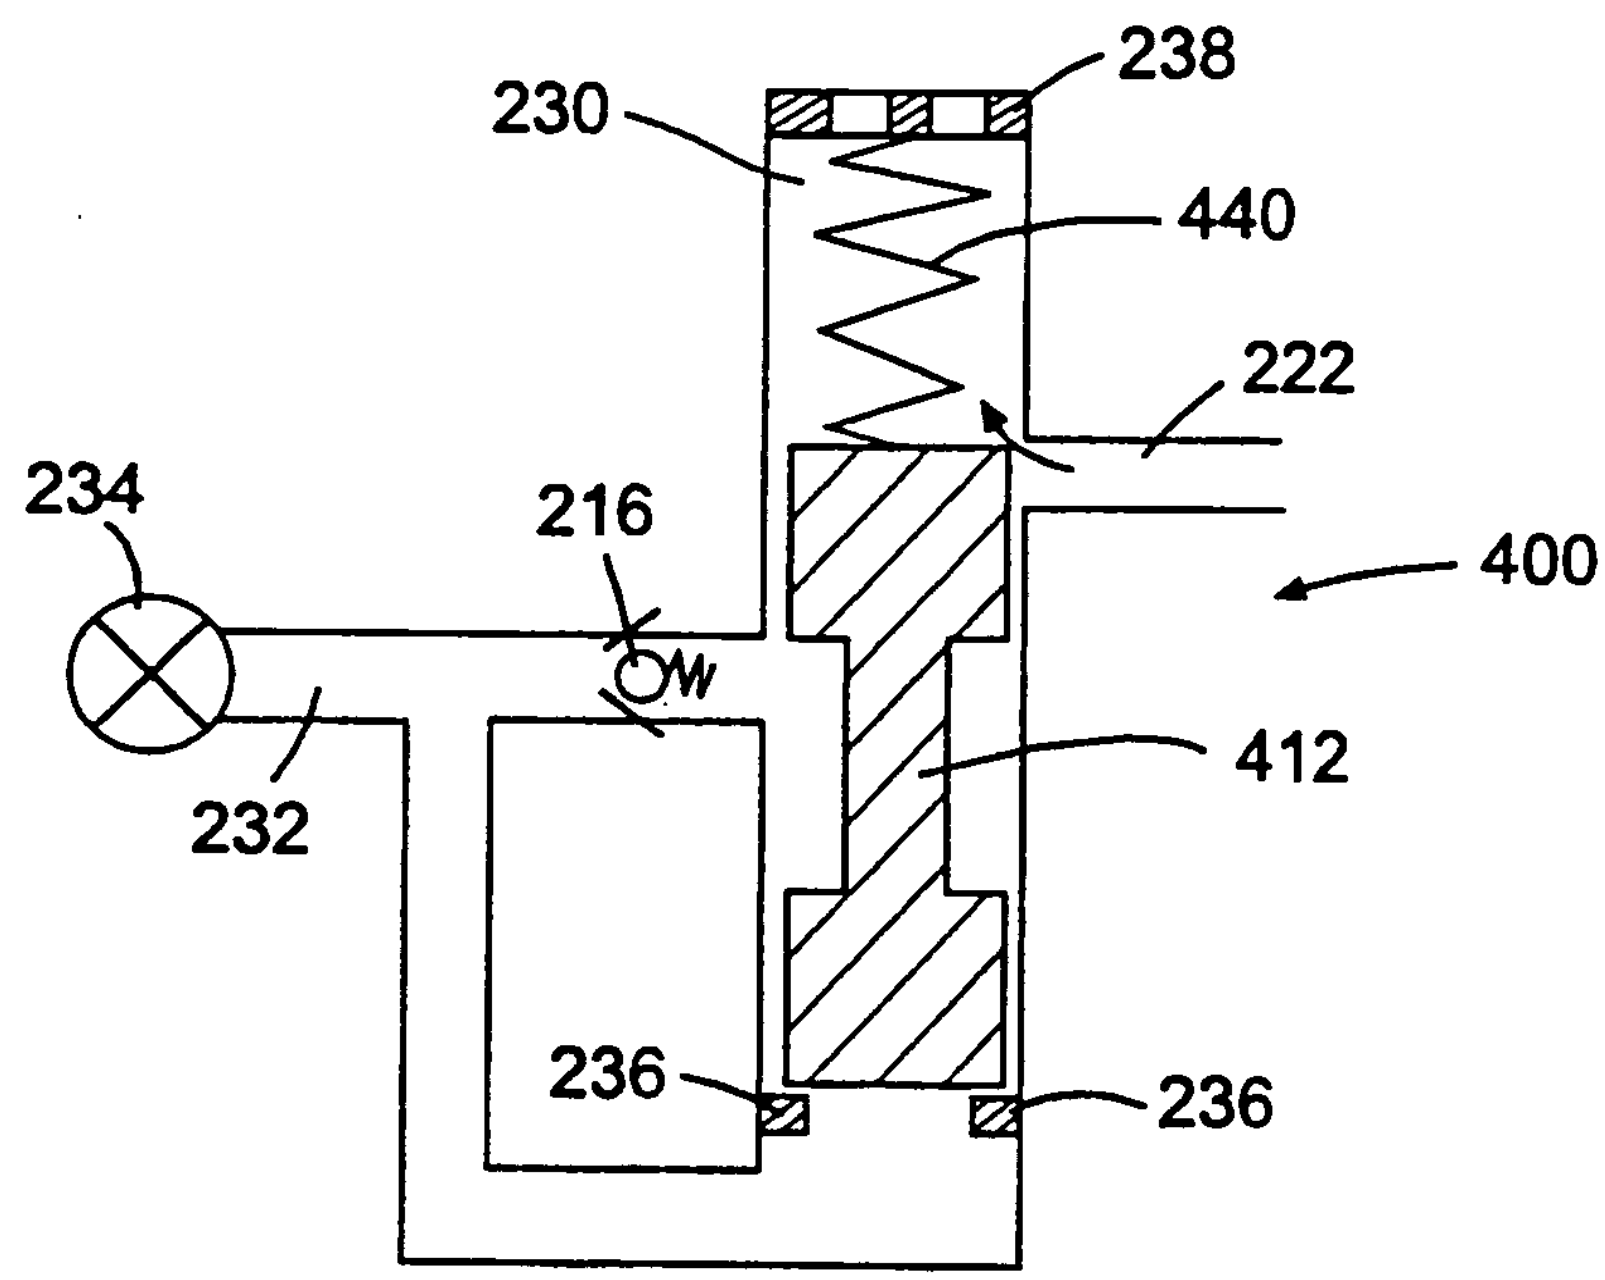
238
230
440
222
234
216
400
412
232
236
236

FIG. 7

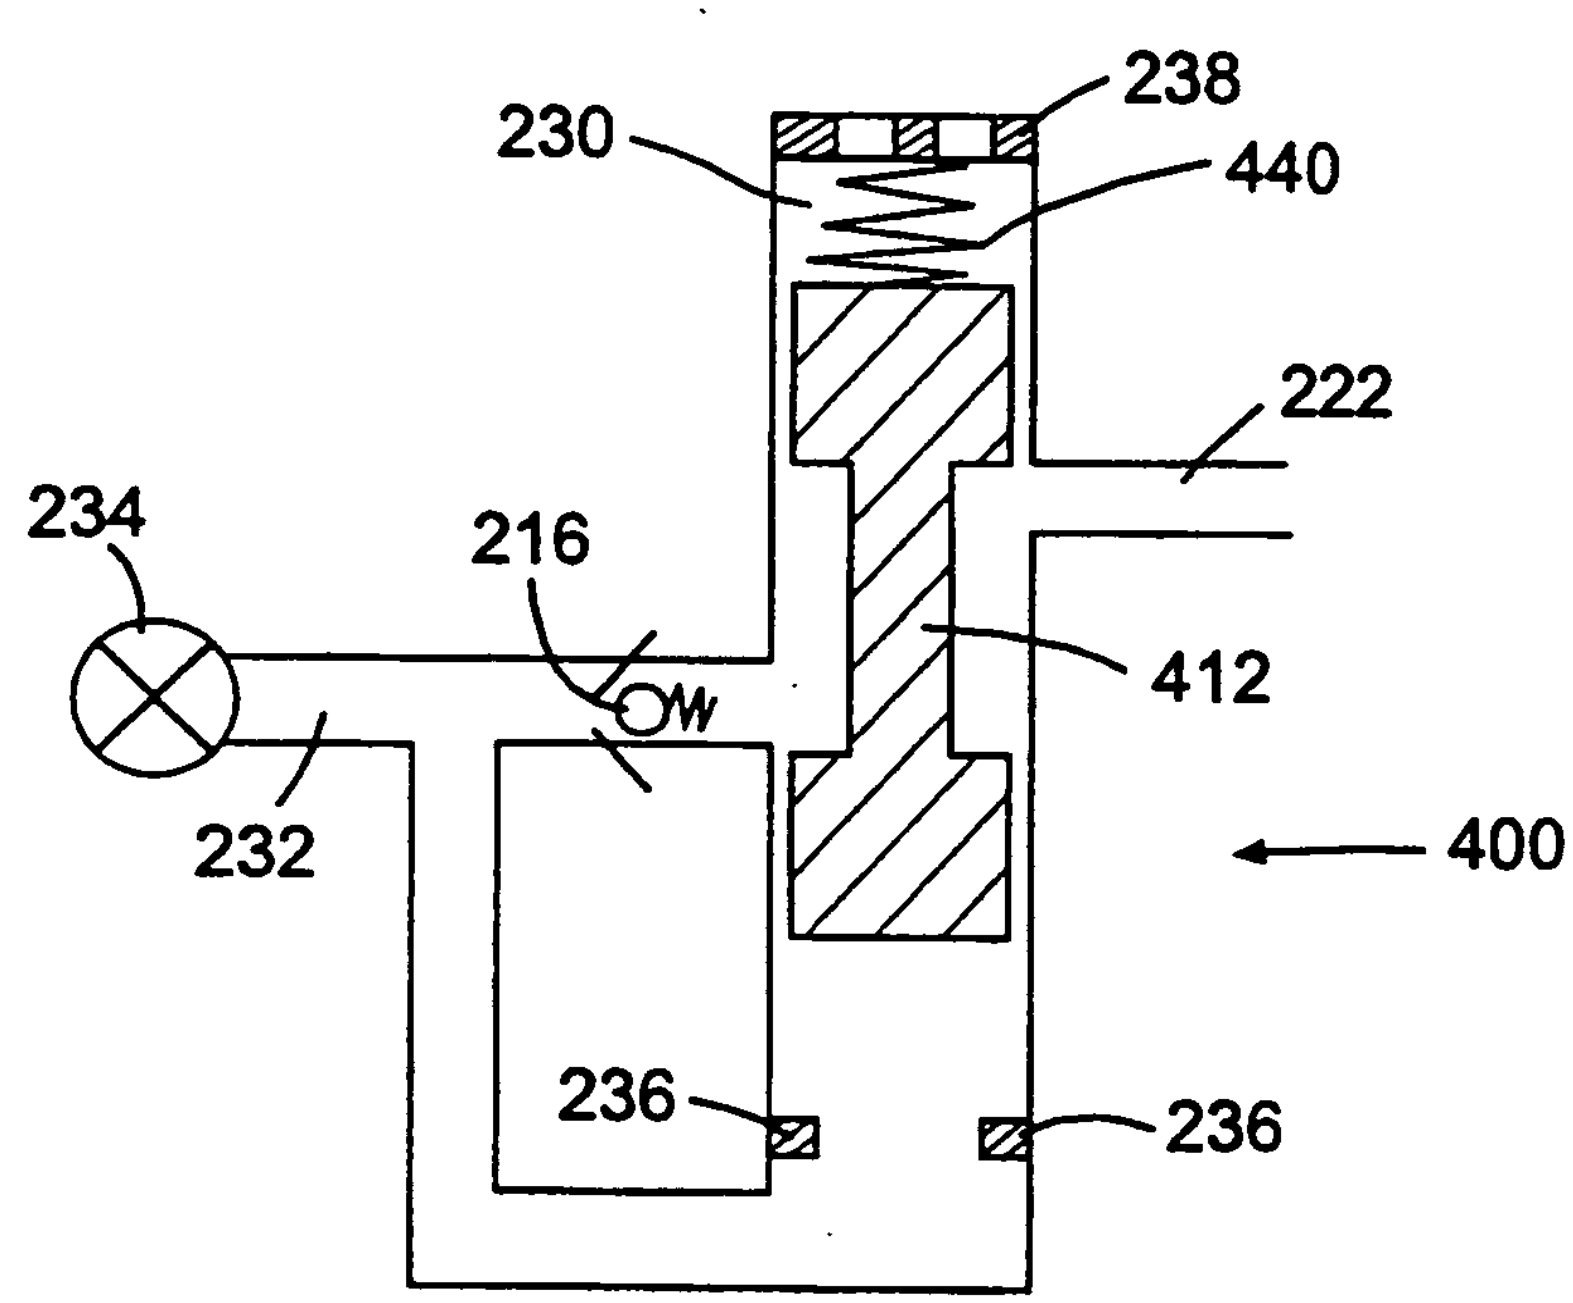
238
230
440
222
234
216
412
400
232
236
236

FIG. 8

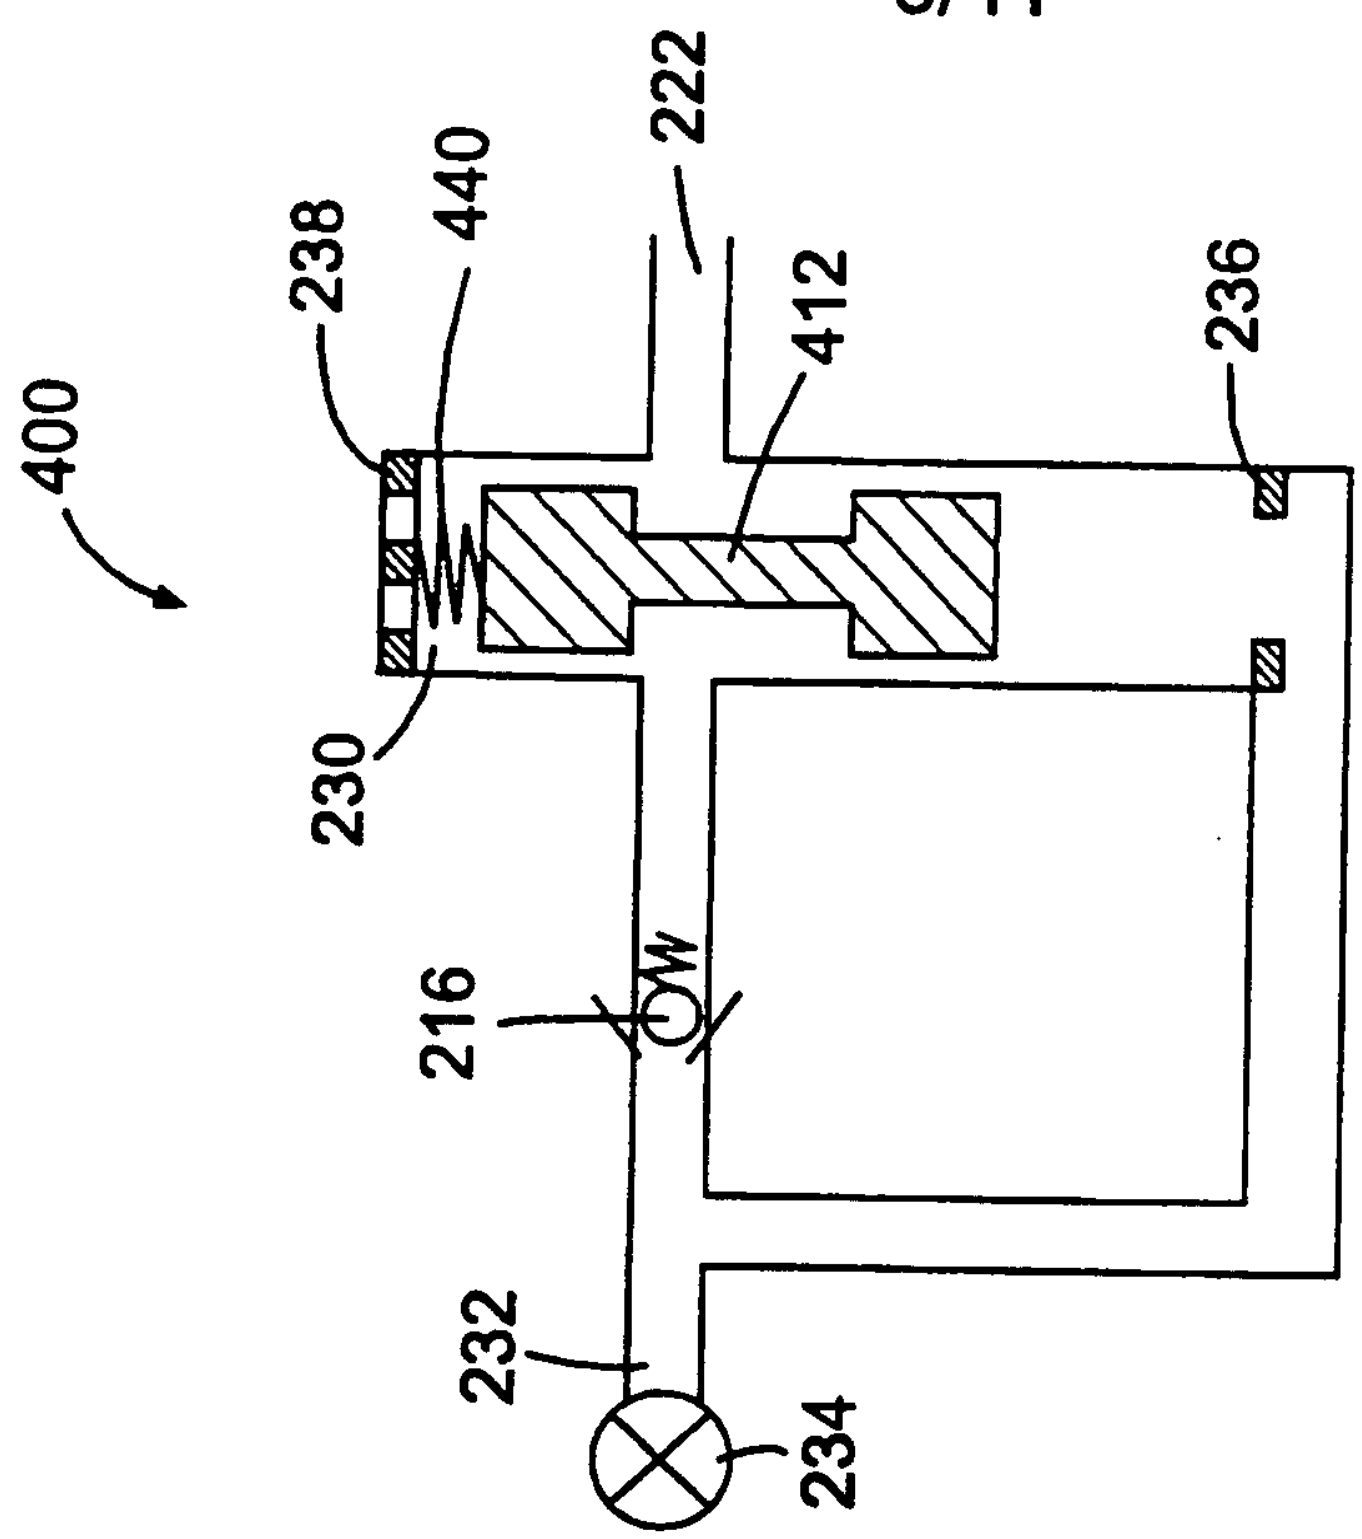
400
238
440
222
412
236
230
216
232
234

FIG. 10

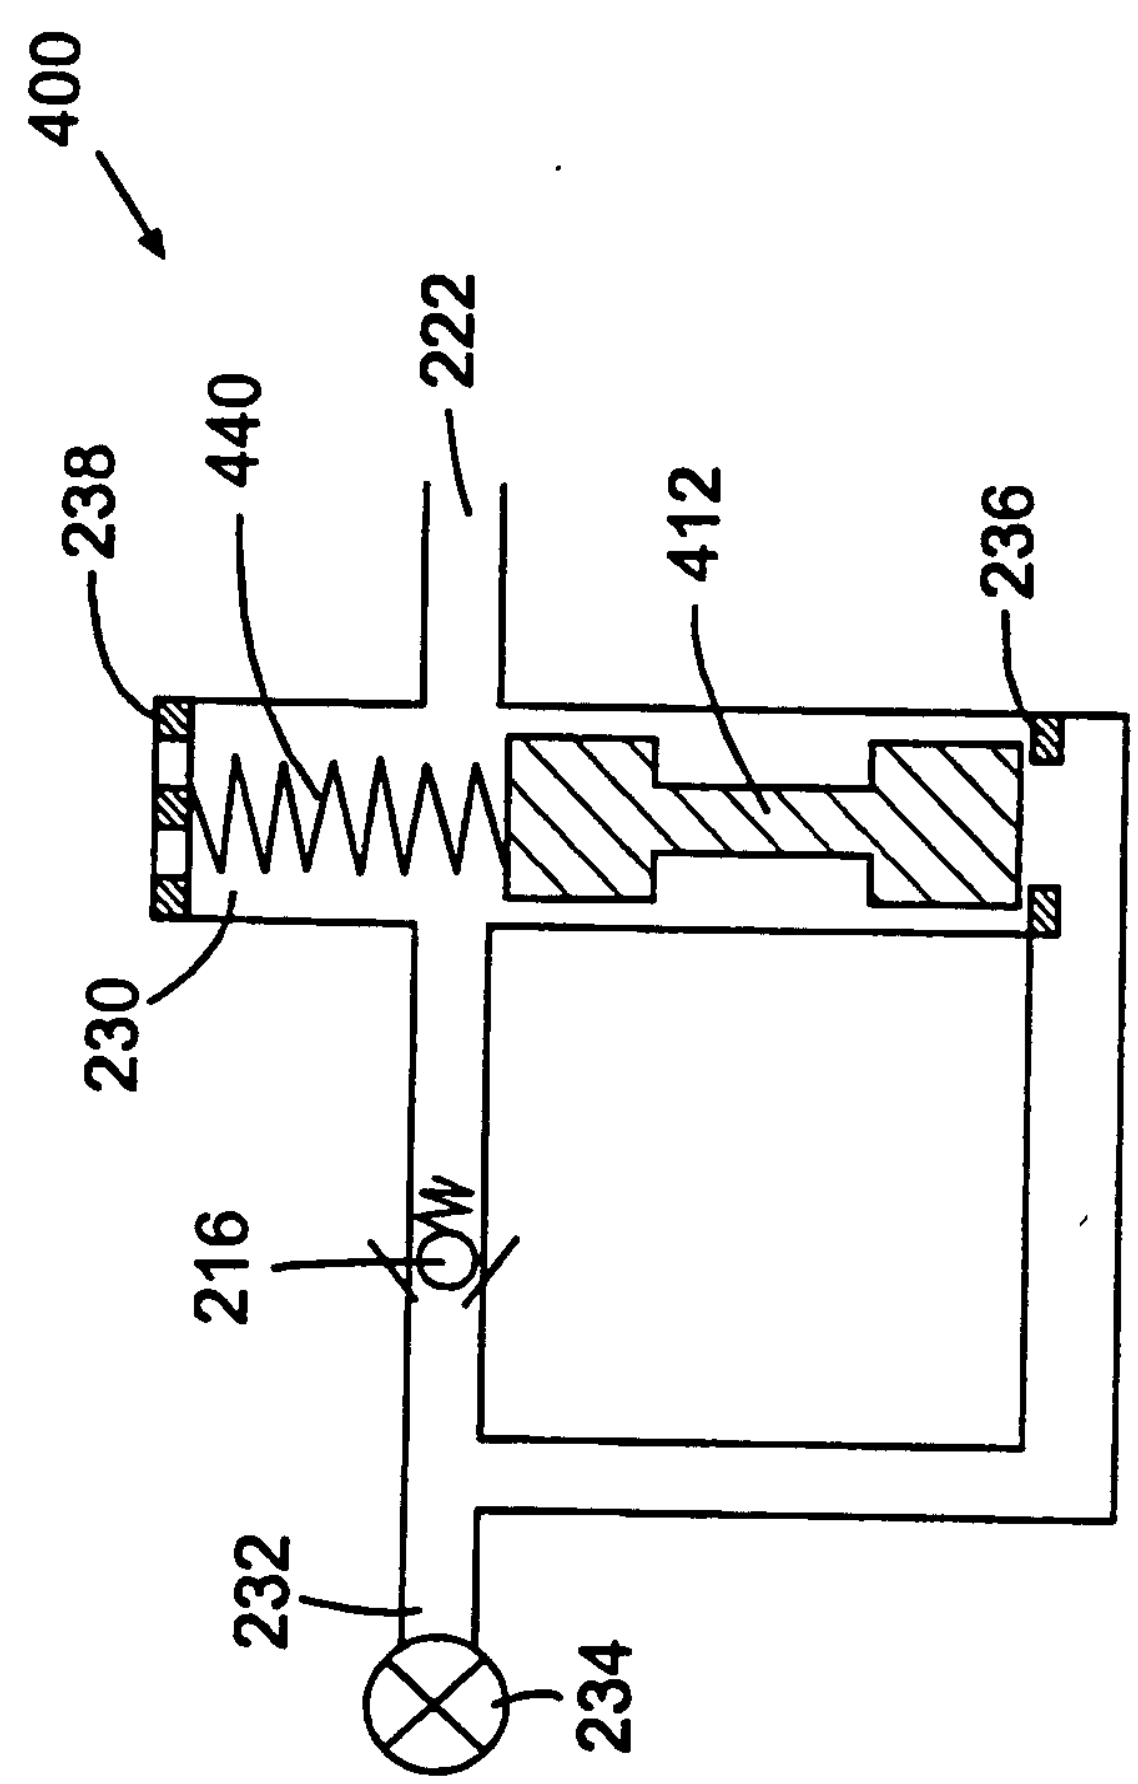
400
238
440
222
412
236
230
216
232
234

FIG. 9

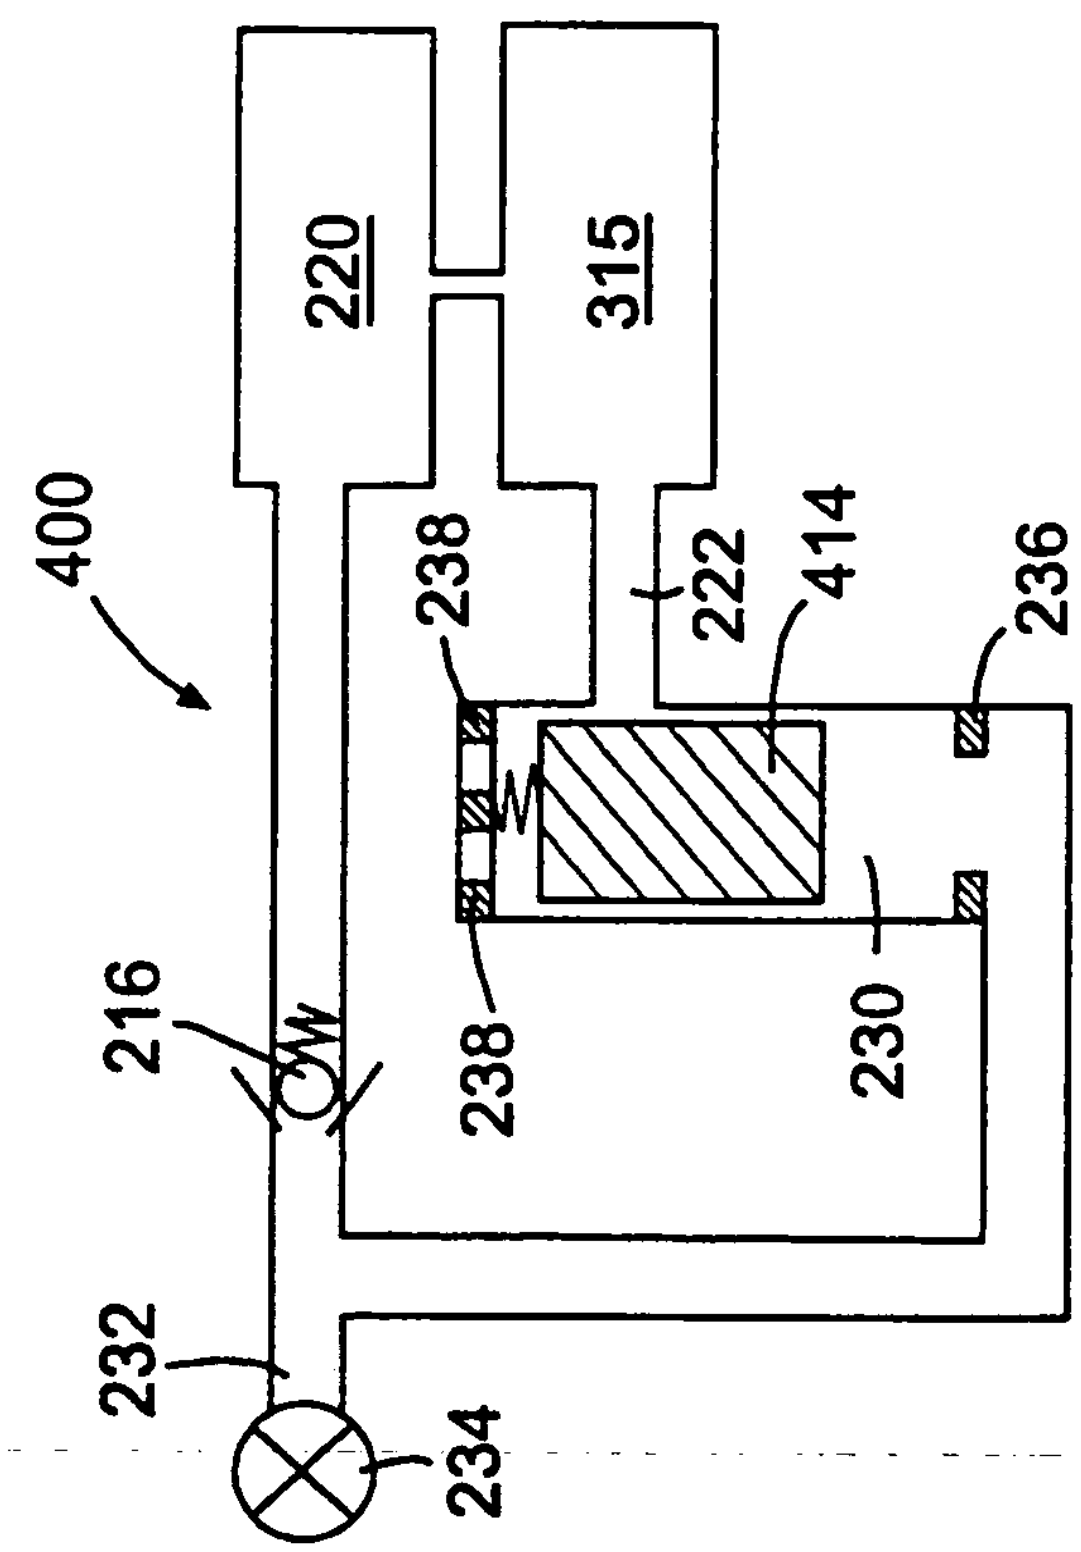
220
315
400
238
222
414
236
216
238
230
232
234

FIG. 12

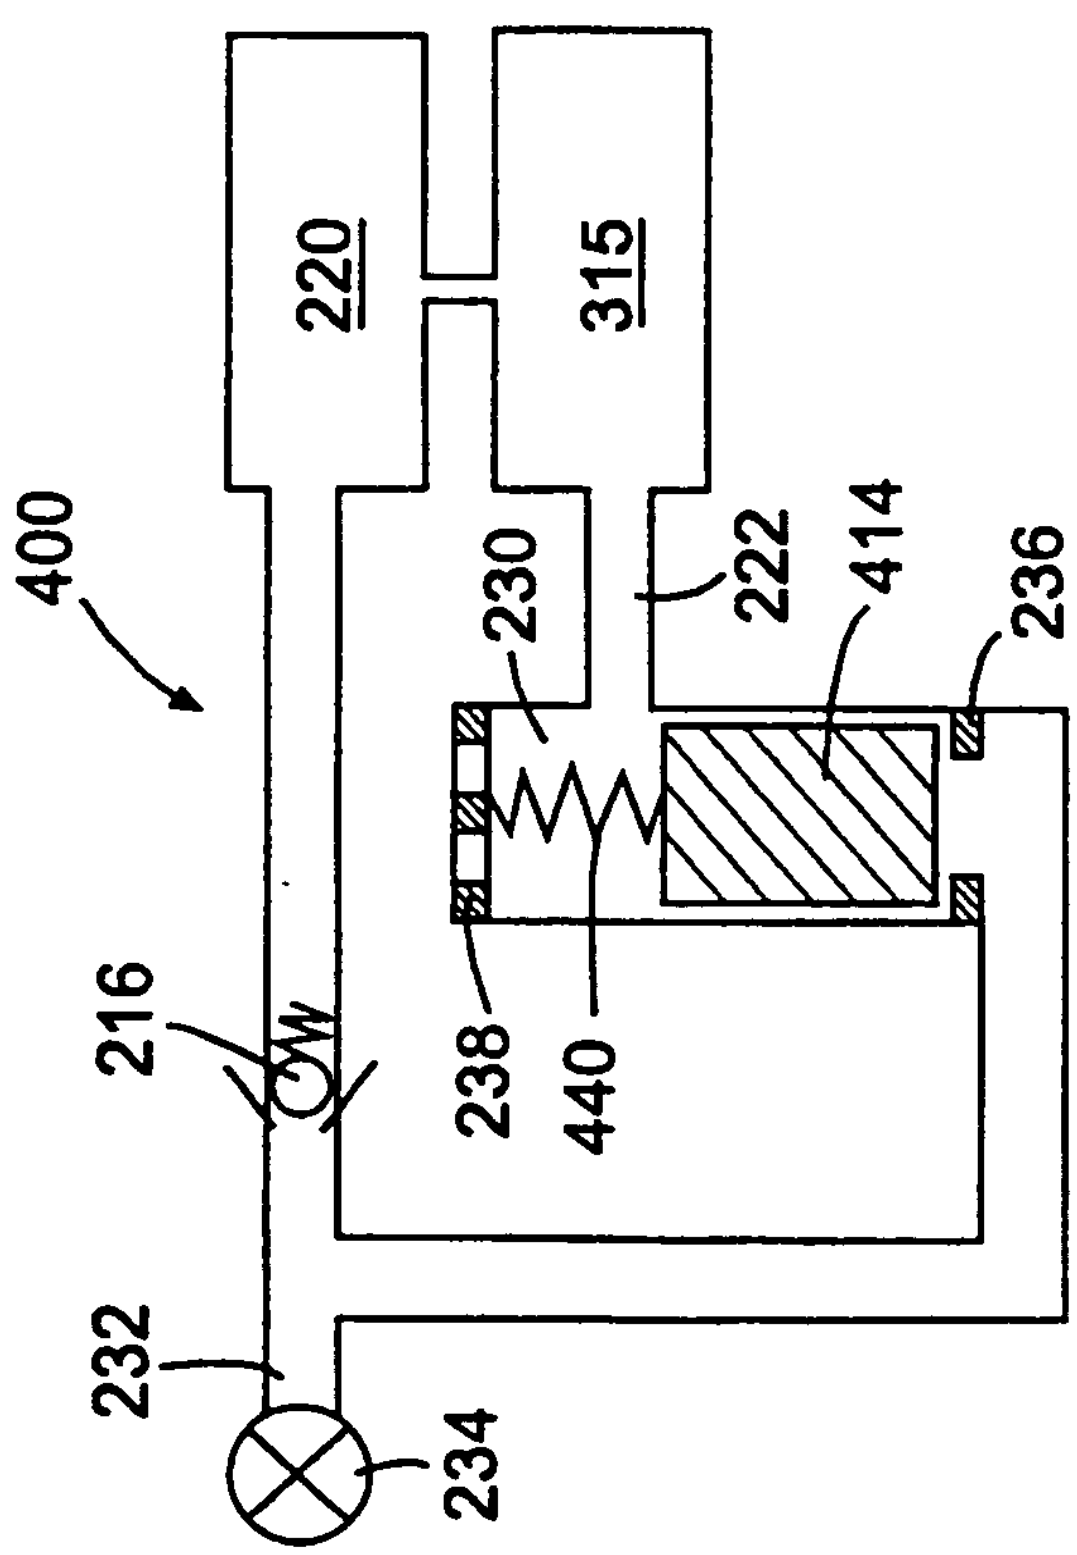
220
315
400
230
222
414
236
216
238
440
232
234

FIG. 11

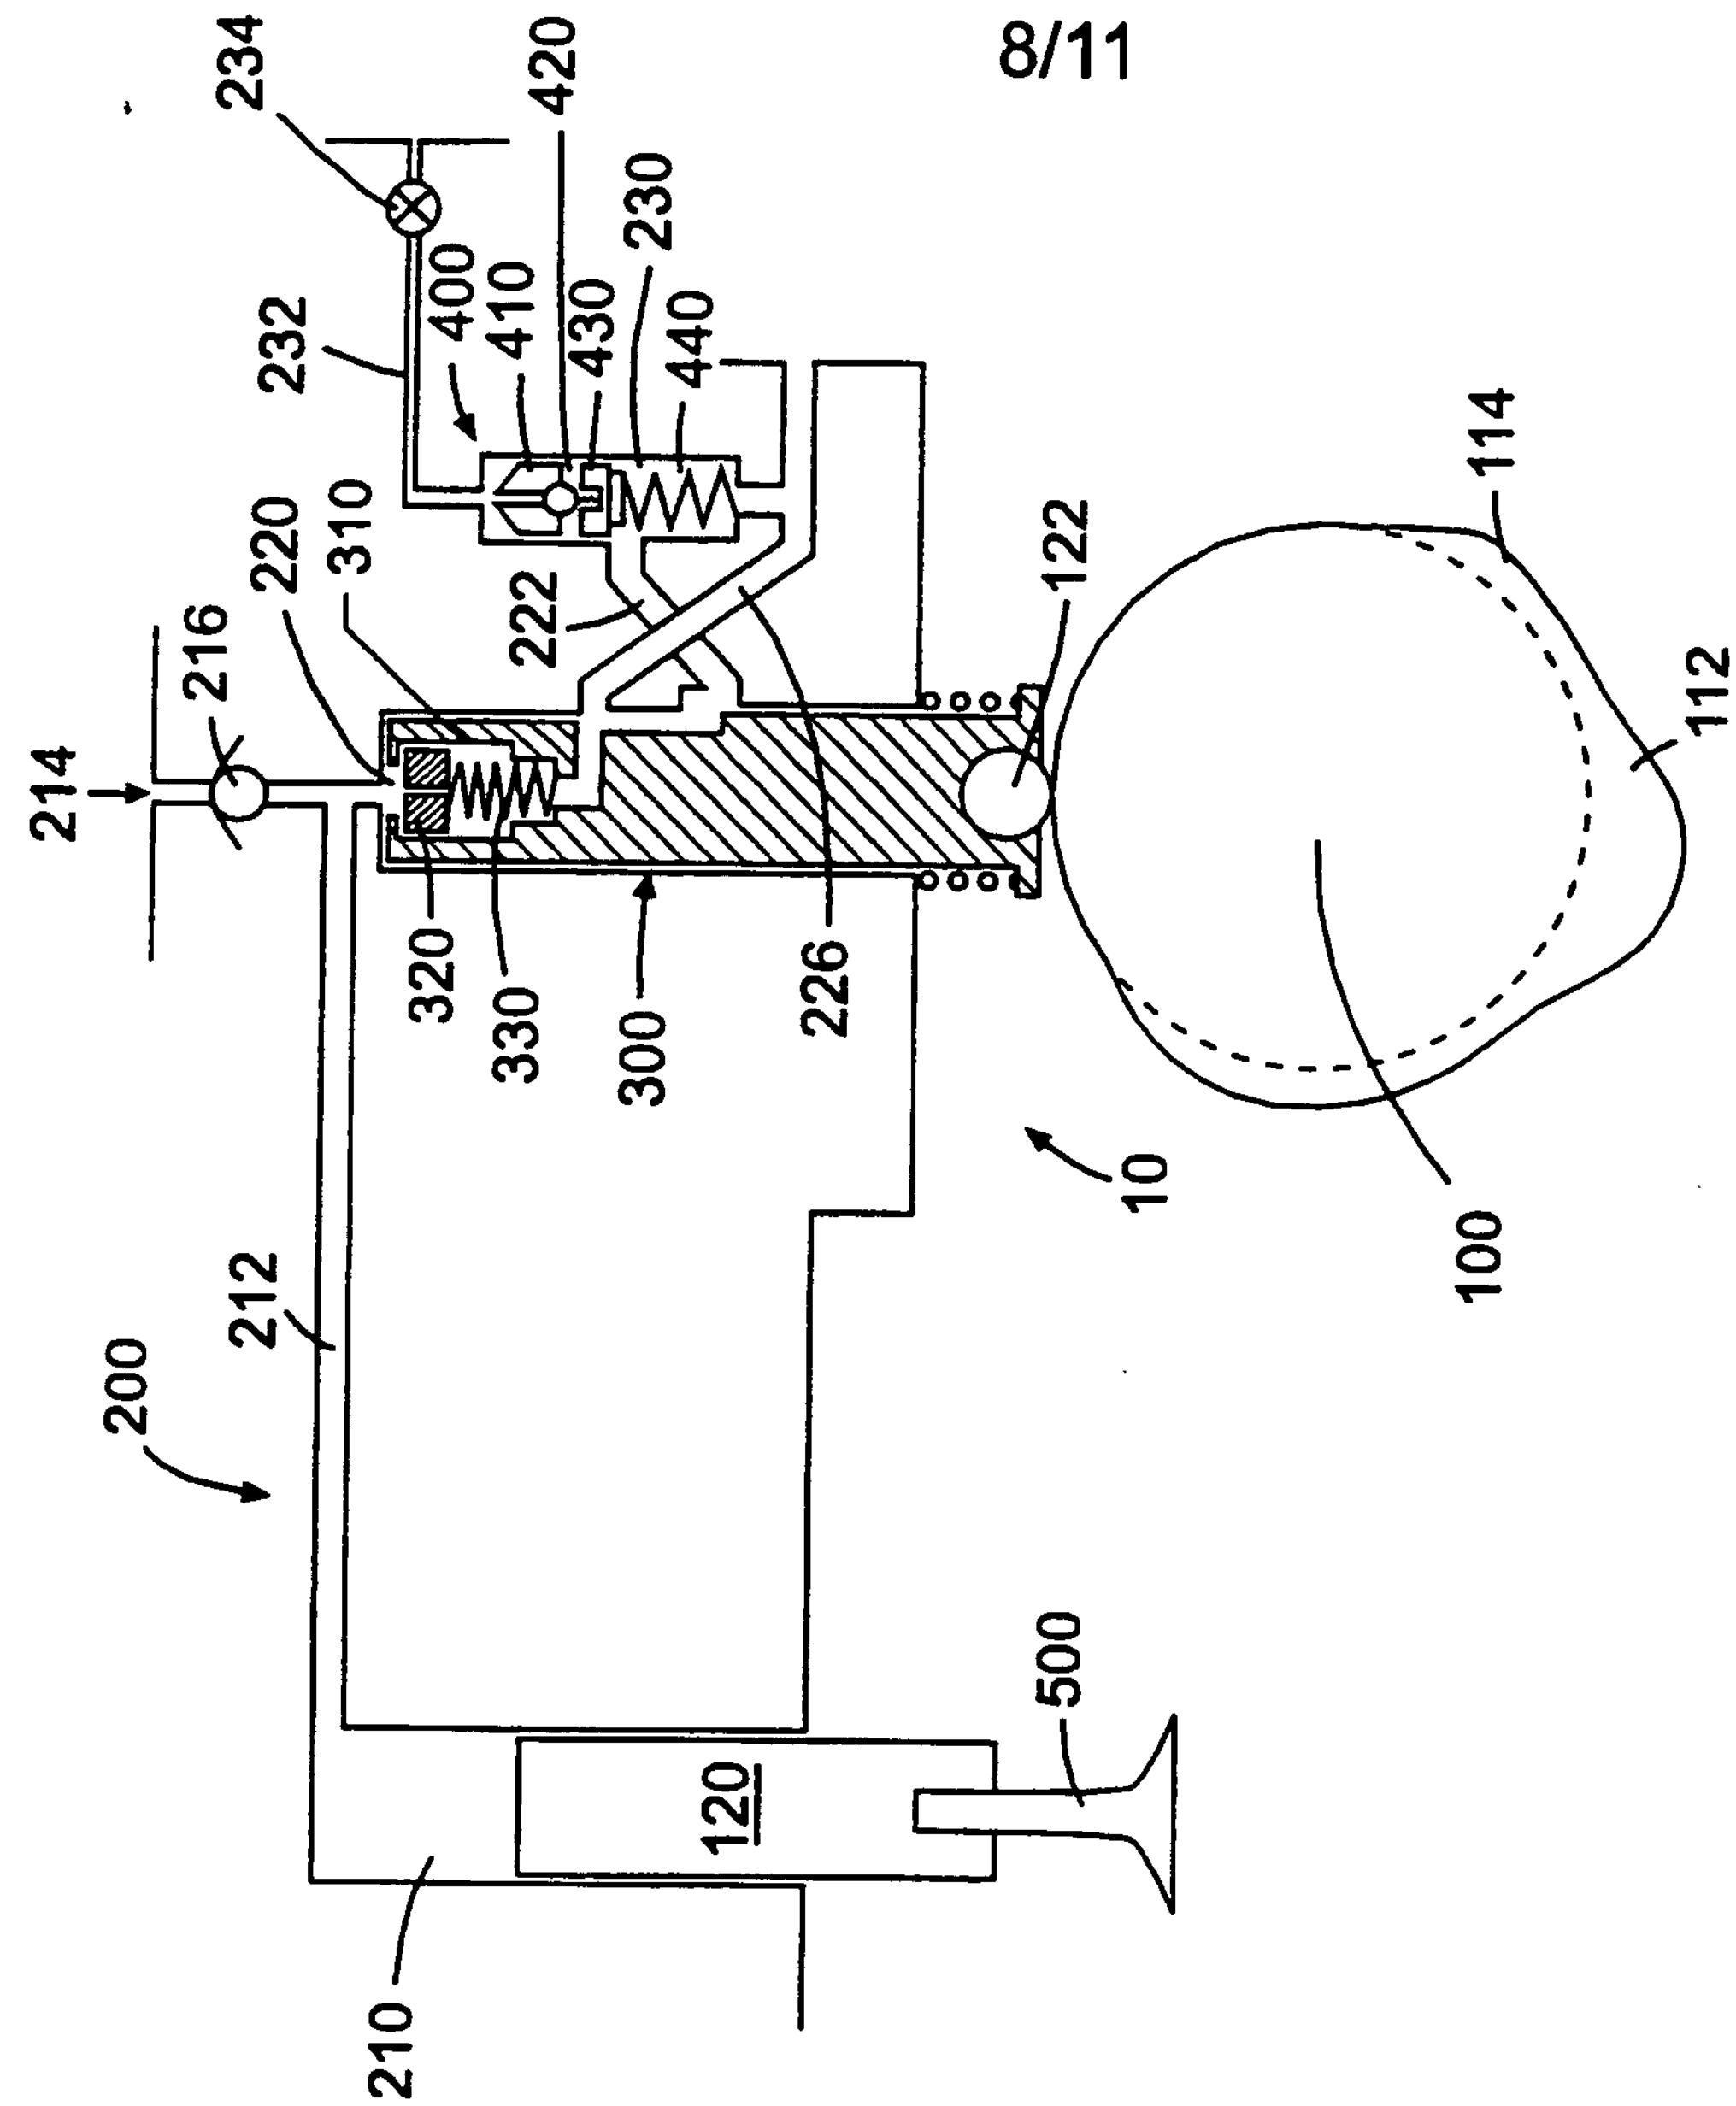
234
420
230
232
400
410
430
440
214
216
220
310
222
226
114
122
112
320
330
300
10
100
200
212
500
120
210

FIG. 14

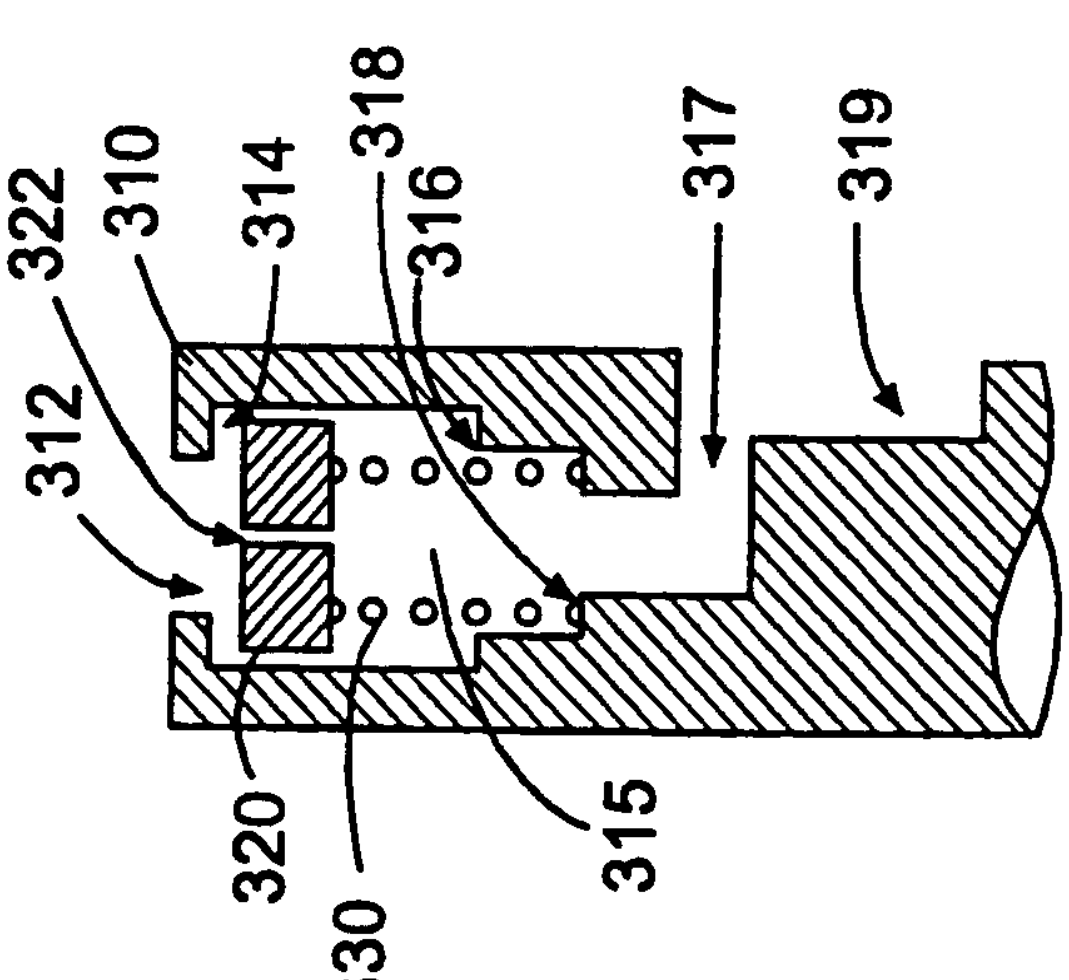
318
317
319
322
310
314
316
312
320
330
315

FIG. 13

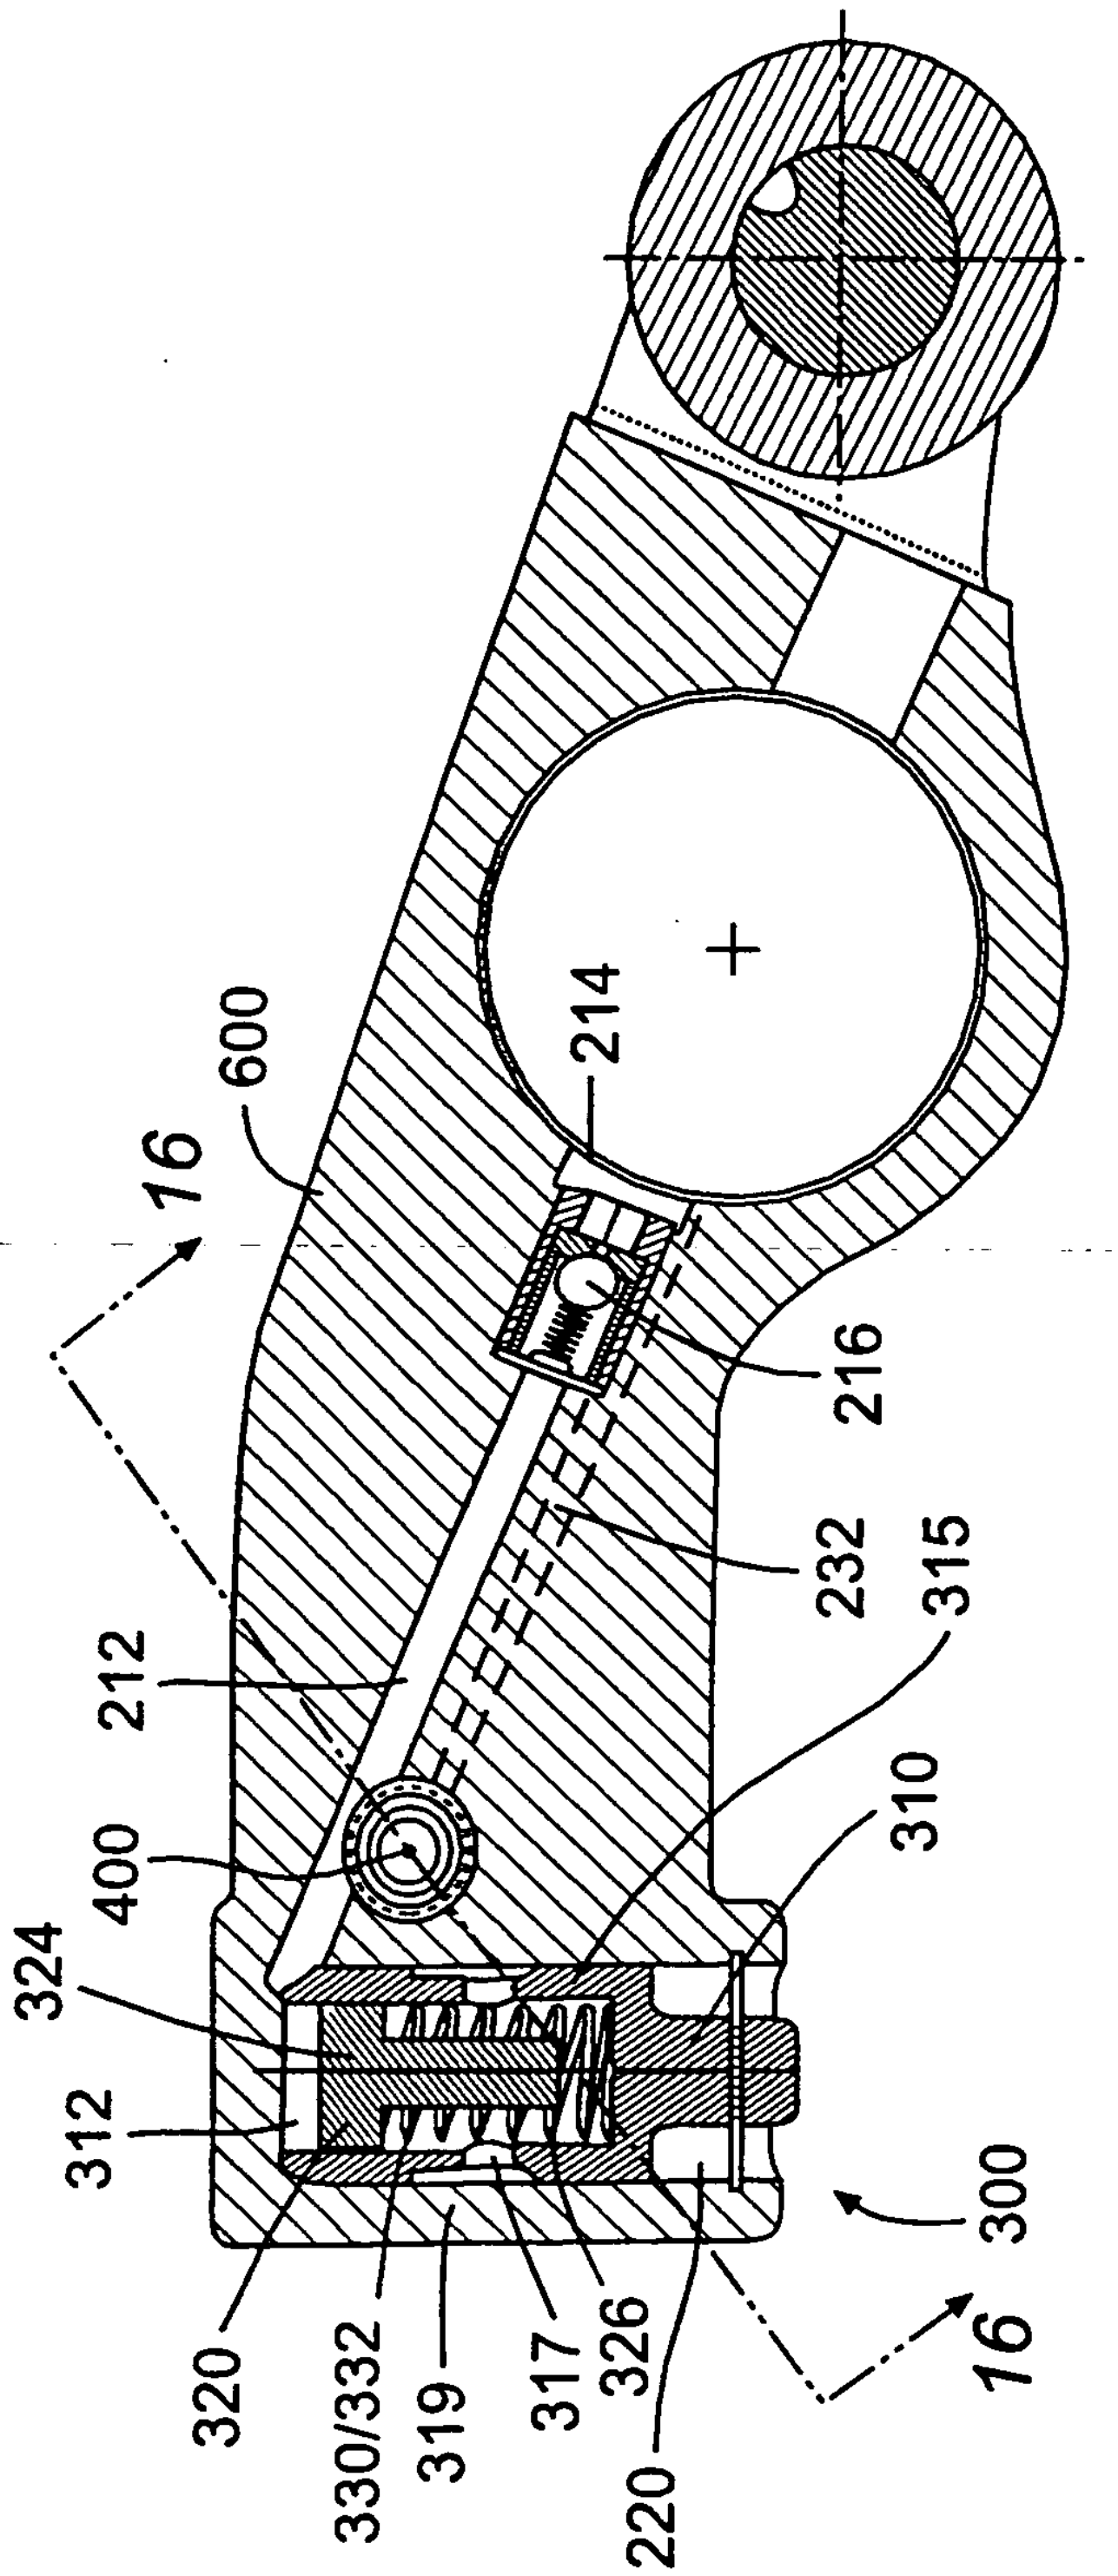

16
600
214
216
232
315
212
400
310
324
312
300
320
330/332
319
317
326
220
16

FIG. 15

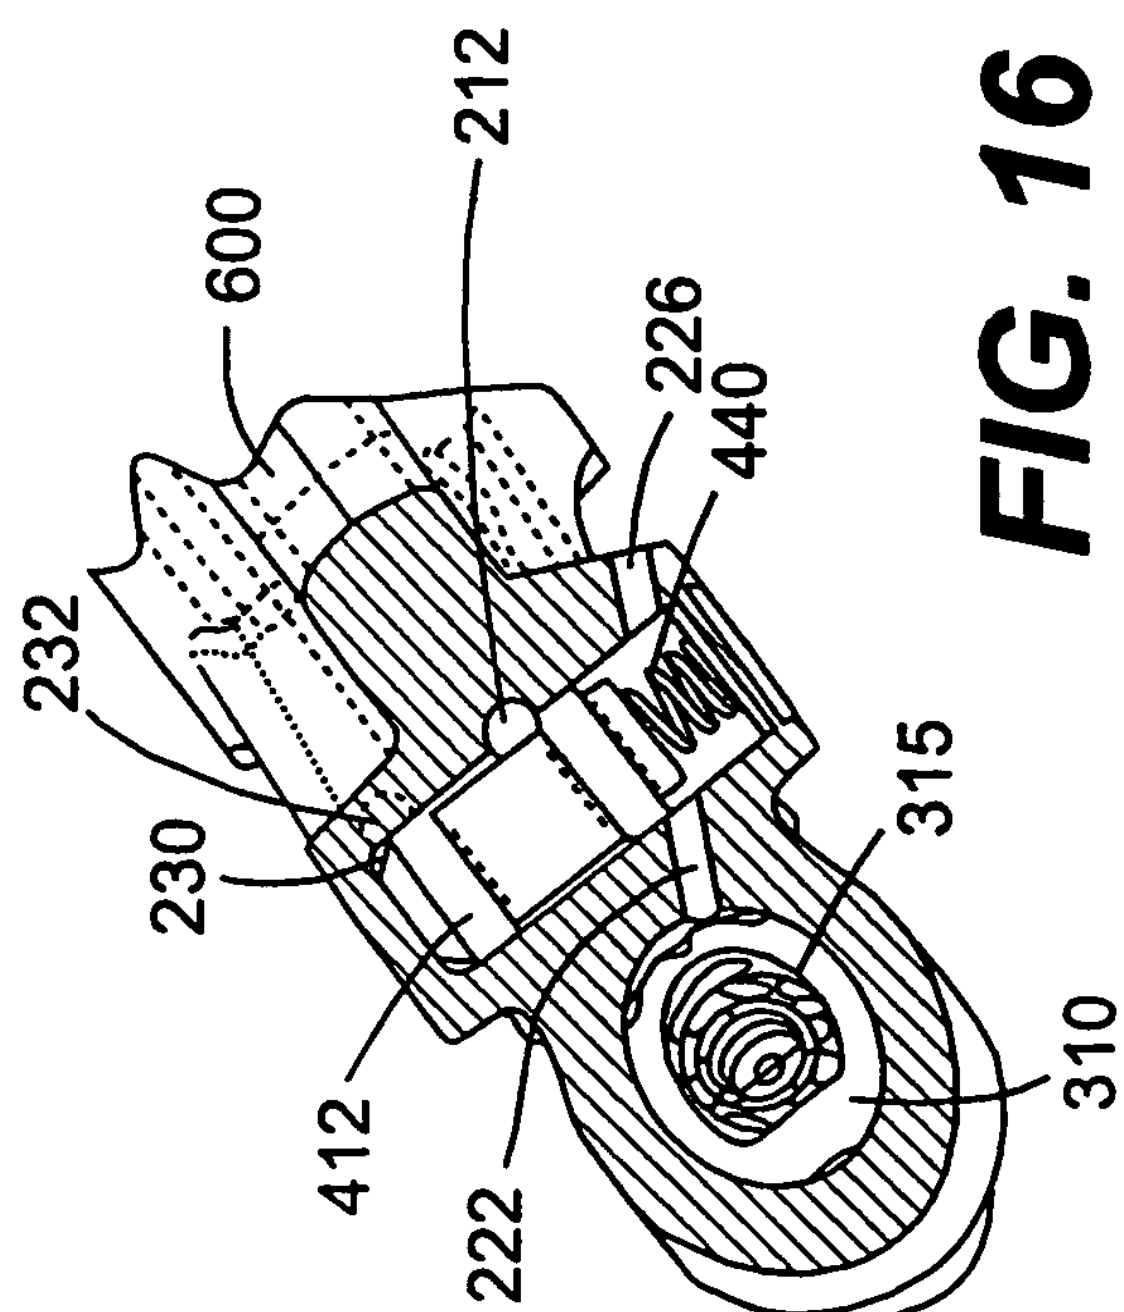

212
600
226
440
232
230
315
310
412
222

FIG. 16

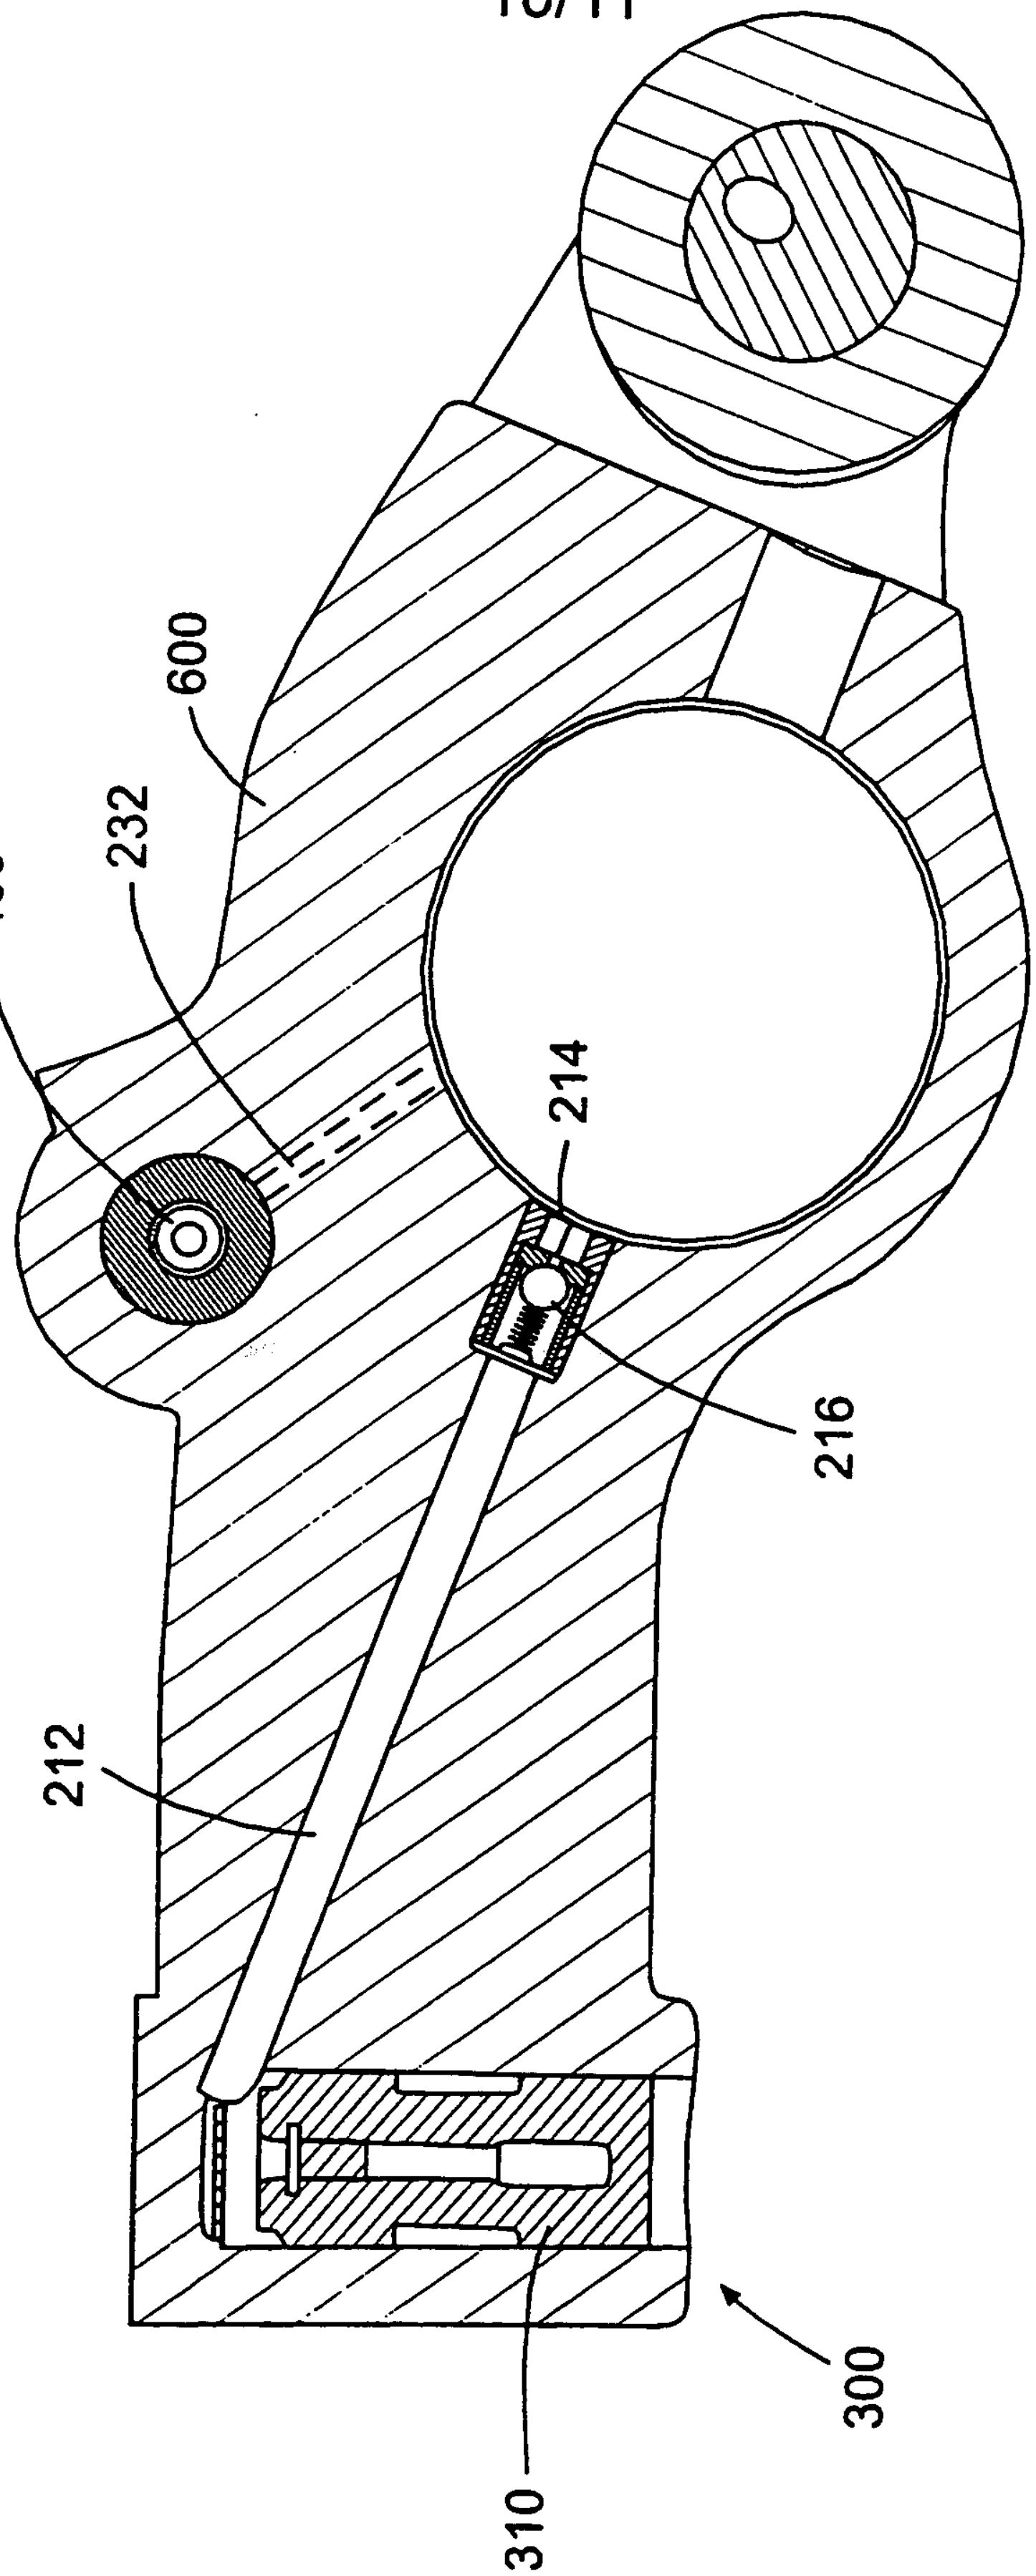

FIG. 17

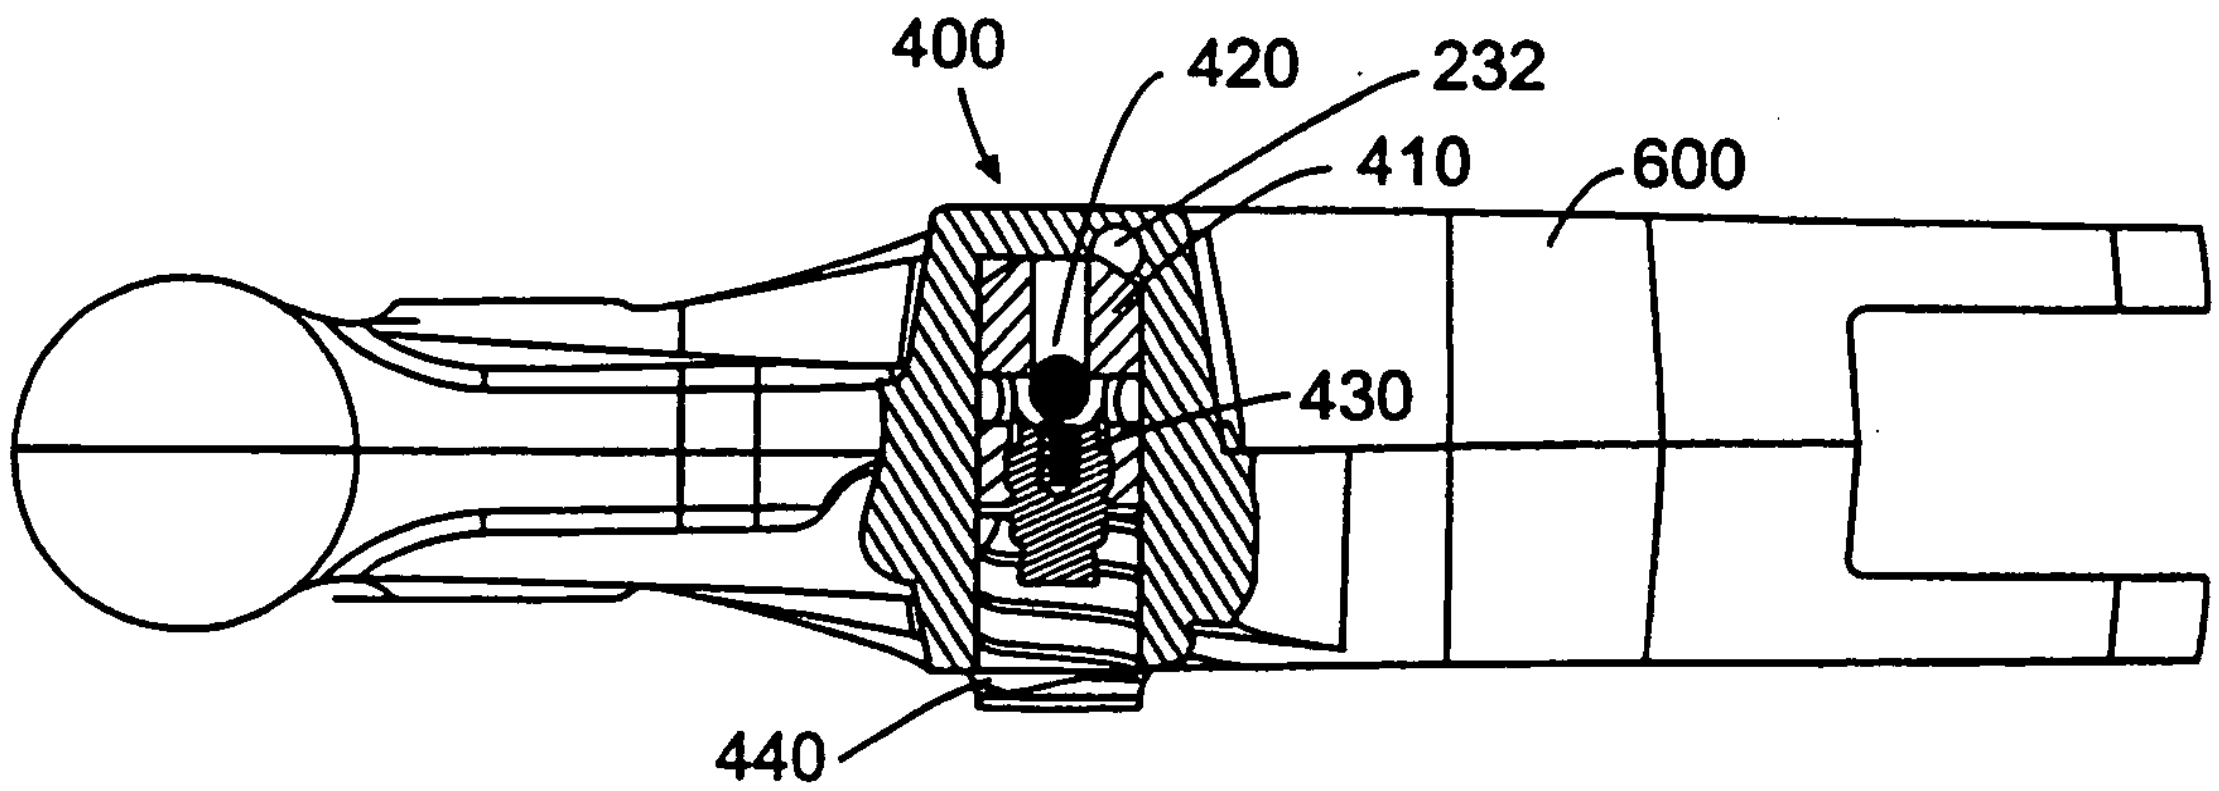

FIG. 18

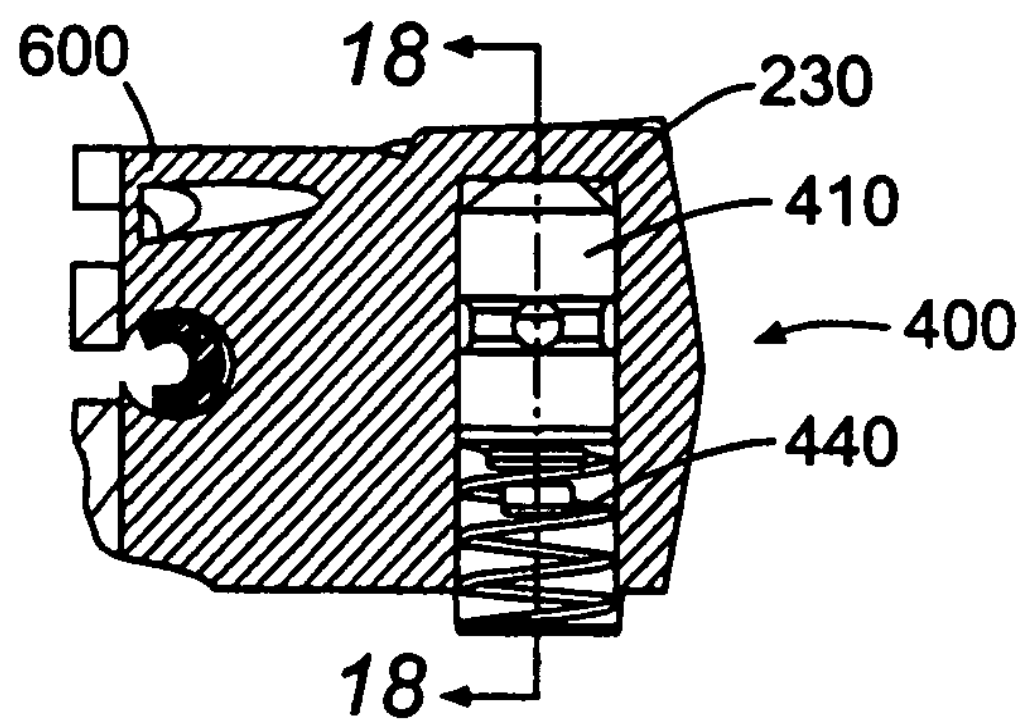

FIG. 19

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/25298

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : F02D 13/04; F01L 1/34

US CL : 123/321, 90.15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 123/321, 90.15, 322, 90.11, 90.12, 90.16, 90.17

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Continuation Sheet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,680,841 A (HU) 28 October 1997 (28.10.1997), see figure 1	1,130 --- 2-129,131-139
Y	US 5,105,782 A (MENEELY) 21 April (21.04.1992), see entire document.	1-139

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing f the international search report
01 December 2000 (01.12.2000)	18 DEC 2000

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703)305-3230

Auth rized officer

Yuen Henry T. Hurley for

Teleph ne No. (703)308-0861

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

International application N .

PCT/US00/25298

Continuation of B. FIELDS SEARCHED Item 3: BRS
searched terms: valve, lost motion, intake, exhaust, timing, accumulator